

DANTE

DL Dante Expansion Card¹

The Mackie DL Dante Expansion card connects the DL32R 32-Channel Digital Live Sound mixer to any Dante-enabled audio network.

Dante is the de facto standard in digital audio networking, delivering unmatched audio quality, extremely flexible routing and offers significant cost savings compared to traditional analog cable runs.

With 32x32 channels of Dante I/O, the user can route Dante inputs like microphones and other sources to any channel on the DL32R. It's also perfect for sending any DL32R signal to Dante enabled loudspeaker systems and amplifiers.

The card features dual Dante ports for daisy chaining or system redundancy and a dedicated Wi-Fi control port that eliminates the need for an Ethernet switch in many situations.

The DL Dante Expansion Card includes Dante Virtual Sound Card, which enables multi-tracking recording / playback between Dante and a Mac or PC.

With flawless interoperation with hundreds of Dante-enabled products and a rock solid, glitch-free operation, the DL Dante Expansion Card truly expands the DL32R's functionality and application-flexibility in any professional environment.



FEATURES:

- 32x32 48 kHz digital audio interface connecting the Mackie DL32R to a Dante network using Cat5e
- Route any signal to the Dante network from the DL32R using Master Fader control software
- Dual Ethercon connectors for Dante daisy-chaining or redundant Dante mode
- Dedicated Wi-Fi control port eliminates need for Ethernet switch in many applications
- Automatic device discovery and custom channel naming with easy one click routing using Dante Controller software for Mac and PC
- Extremely stable, glitch-free low-latency design
- Includes Dante Virtual Soundcard for recording and playback of up to 64x64 channels via Mac or PC
- Use simultaneously with DL32R USB I/O for total routing and recording control
- Simple two-screw user installation



Like us



Follow us



Watch our dang videos

¹ Dante expansion card sold separately.

DANTE SPECIFICATIONS

Number of ports and functionality:

2x Ethercon Gigabit Ethernet Dante Ports

1x RJ45 Gigabit Ethernet Wi-Fi Control Port

32 receive / 32 transmit channels, 48 kHz, 24-bit

Supports Dante Redundant and Switch modes

Configuration via Dante Controller

Physical Properties (product)

Height: 1.7 in / 44 mm

Width: 5.8 in / 147 mm

Depth: 4.8 in / 122 mm

Weight: 1.0 lb / 0.5 kg

Physical Properties (packaged product)

Height: 2.9 in / 74 mm

Width: 5.9 in / 150 mm

Depth: 7.3 in / 185 mm


Weight: 1.0 lb / 0.5 kg

Ordering Information

Dante Expansion Card, US:

P/N 2042901

DANTE REAR PANEL

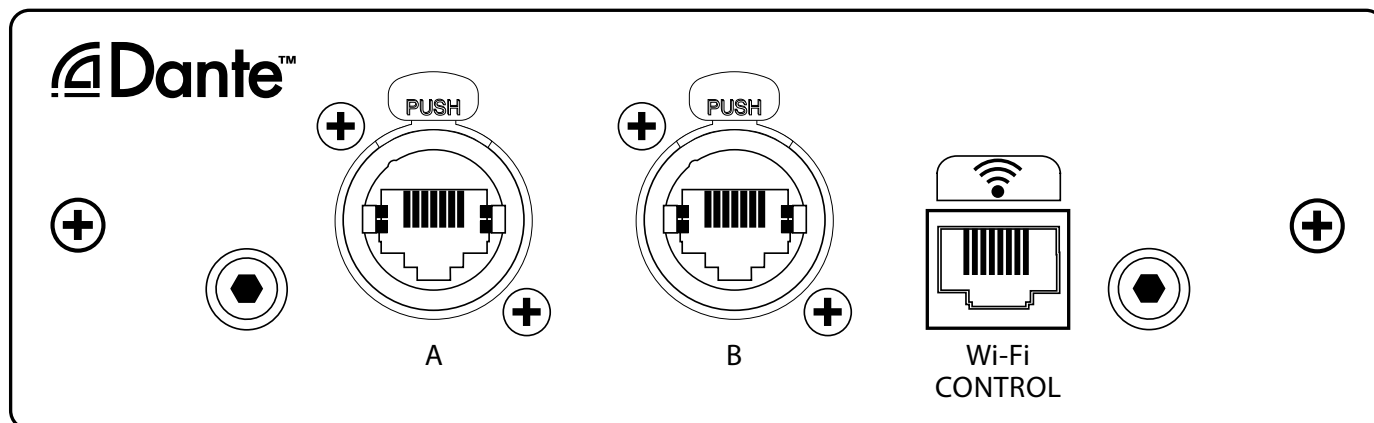


DANTE DIMENSIONS

NOTES:

1. WEIGHT APPROX. 1.0 lb [0.5 kg].

2. SHIPPING WEIGHT APPROX. 1.0 lb [0.5 kg].

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES DUAL [MM] DIMENSIONS FOR REF ONLY

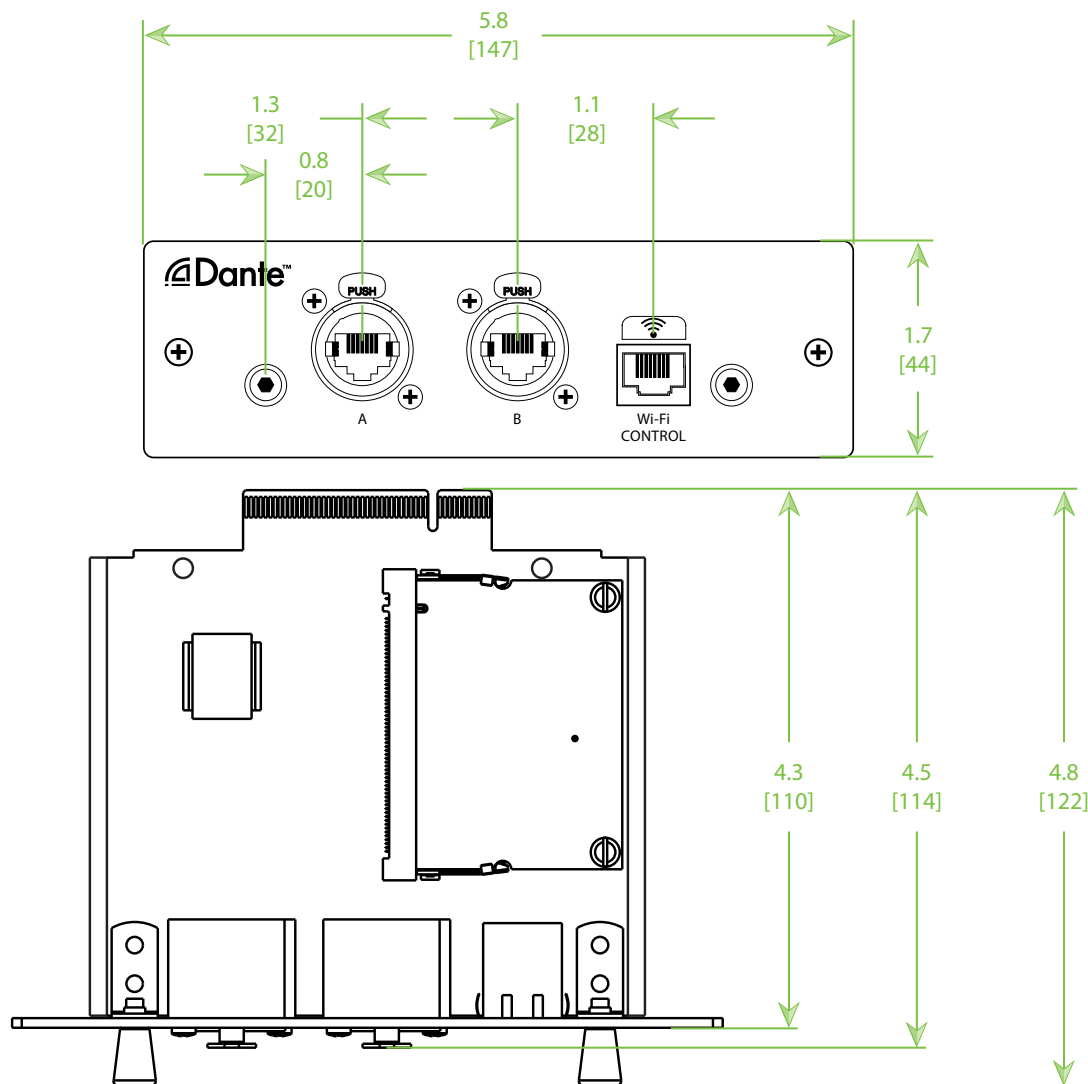

©2015 LOUD Technologies Inc. All rights reserved. Apple and iPad are registered trademarks of Apple, Inc., registered in the U.S. and other countries. All other marks are Registered Trademarks, or Trademarks, of LOUD Technologies in the United States and other countries. Dante Patent Pending.

LOUD Technologies Inc. is always striving to improve our products by incorporating new and improved materials, components, and manufacturing methods. Therefore, we reserve the right to change these specifications at any time without notice.

Electronic files for this product are available at:

www.mackie.com

Specification Sheet

Dante_SS.PDF