

MW1-LMC Lavalier microphone

www.boschsecurity.com




BOSCH
Invented for life




- ▶ Lavalier clip-on microphone with windscreen
- ▶ For use with the Belt-pack transmitters (MW1-LTX-Fx)

Installation/configuration notes

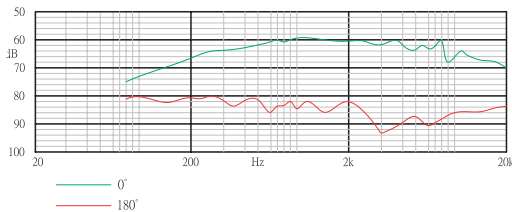

Frequency response

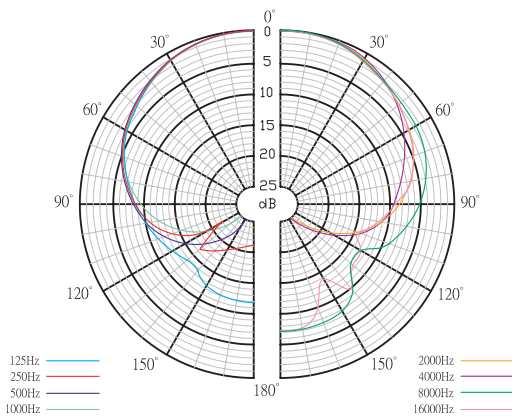

Polar diagram

Parts included

Quantity	Component
1	MW1-LMC Lavalier Microphone
1	Windscreen
1	Clip

Technical specifications

Electrical

Lavalier microphone	
Connector	Mini XLR (tiny QG)
Frequency range	100 Hz to 12 kHz
Polar pattern	Cardioid
Sensitivity (at 1 kHz)	-70 dB ± 3 dB
Impedance	2.2 kohm ±30%
Max SPL for 1% THD	130 dB (SPL)

Mechanical

Lavalier microphone	
Dimensions (L x D)	30 x 16 mm (1.18 x 0.63 in)
Color	Charcoal
Weight	20 g (0.04 lb)
Cable length	1 m (39.37 in)

Ordering information

MW1-LMC Lavalier microphone

Lavalier clip-on microphone with windscreen, for use with the Belt-pack transmitters MW1-LTX-F4, MW1-LTX-F5 and MW1-LTX-F6.

Order number **MW1-LMC**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia