

FreeSpace® Model 360P-II In-Ground Loudspeaker



The sound you'll notice. The speaker you won't.

The FreeSpace Model 360P-II loudspeaker reproduces music with the presence and depth you would expect only indoors. And it delivers notes that can be easily understood – even in busy outdoor environments. All while disappearing into nearly any outdoor setting.

Put sound where the listeners are.

The durable 360P-II loudspeaker is designed to work in locations where many conventional speakers cannot – shrubbery, gardens, pool areas. It is a proven solution for outdoor locations such as restaurants, amusement parks, open-air retail environments, and resort and hospitality venues. It can also be used indoors in large open spaces like atriums, foyers, and malls.

More sound coverage with fewer loudspeakers.


Using an innovative design, the 360P-II loudspeaker provides 360° coverage, so fewer loudspeakers

are needed than with many conventional ground-mounted loudspeakers. Sound is dispersed evenly both horizontally and vertically allowing listeners to hear consistent sound either sitting or standing.



The sound you want. The durability you need.

A heavy-duty enclosure and an advanced composite driver make the FreeSpace 360P-II loudspeaker exceptionally rugged and reliable. It is built to withstand sand, snow, rain, salt and temperature extremes of 158°F (70°C) to -40°F (-40°C). And it survives the Salt Fog test 66% longer than the demanding Marine Industry Standard. It is also backed by a 5-year transferable warranty.



FreeSpace® Model 360P-II In-Ground Loudspeaker

Specifications

FreeSpace® Model 360P-II Loudspeaker

Versions: 70/100V transformer


Taps available: 10W, 20W, 40W, 80W

Frequency response: 70Hz to 16kHz \pm 3dB

Maximum output: 101dB SPL @ 1m

Dispersion: 360° horizontal, 50° vertical

Color: Green

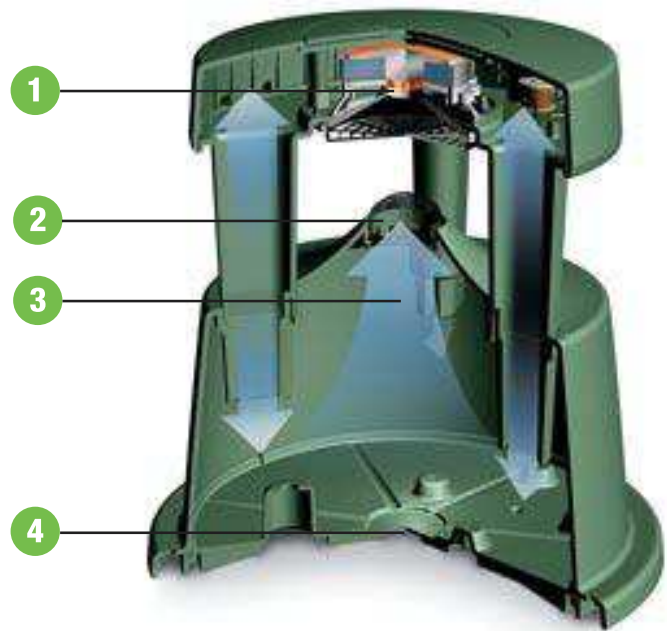

- 1** Downward-firing Bose® environmental 4.5" full-range driver withstands weather extremes all year round.
- 2** Domed port grille reflects sound into the listening area for clear, consistent performance.
- 3** Centrally located port enhances low-frequency reproduction.
- 4** Base flange with 3 mounting holes provides stability and security when surface mounted or set in ground.

Product specifications subject to change without notice.

For more information
call 877.428.2673

or contact
Bose Corporation
Professional Systems
The Mountain
Framingham, MA 01701

www.bose.com/pro

BOSE®
Better sound through research®