Engagement Made Simple

Interactive Flat Panel Display - Education Series (UT)

4K
Ultra High Resolution

20-Points Muti-Touch

Anti-Glare
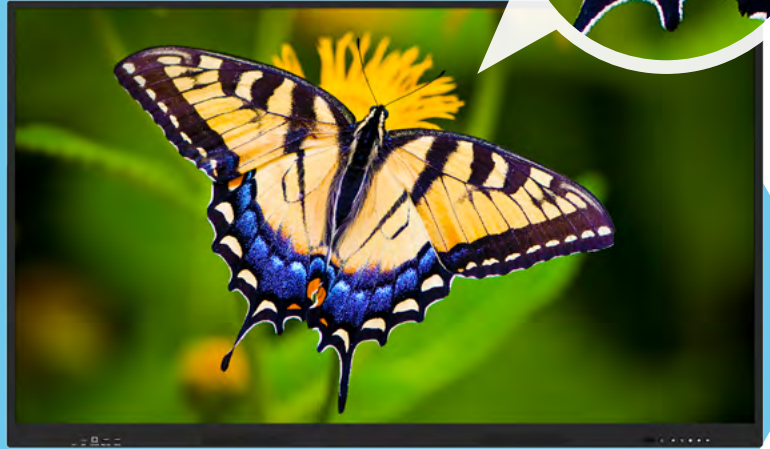
USB-C with Power

Android 9.0

Broad Compatibility

AUO Display Plus, as a global leader in commercial and industrial displays, has designed the Education Series Interactive Flat Panel Display dedicated for collaboration in educational settings. Ranging from 65 to 86 inches, this series features UHD 4K resolution, 20 points multi-touch, built-in interactive tools and apps, and supports both Android and Windows systems, enhancing interactivity and engagement in classrooms and lecture halls.

Superb Image Quality
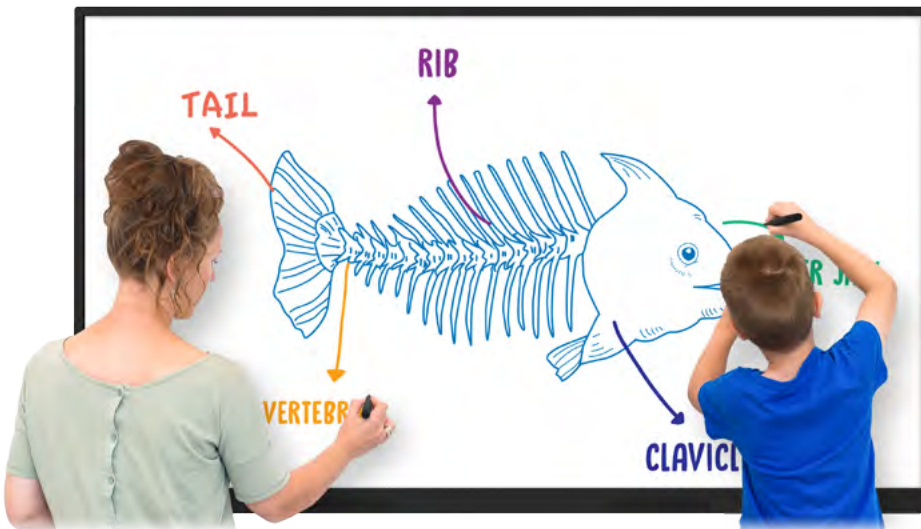
4K Crystal Clear Visuals

The Education Series Interactive Flat Panel Display features native 4K (3840 x 2160) resolution and uses special anti-glare treatment to ensure sharp and clear rendering of images and text under any ambient lighting condition from any viewing angle.

Premium User Experience

Intuitive Interactive Tools

In addition to floating tool bars for easy operation, the series also comes with a range of apps and tools for annotating, whiteboarding, mutli-screen casting, file management, voting, and more, to facilitate interactions in any classroom setting.

File Management
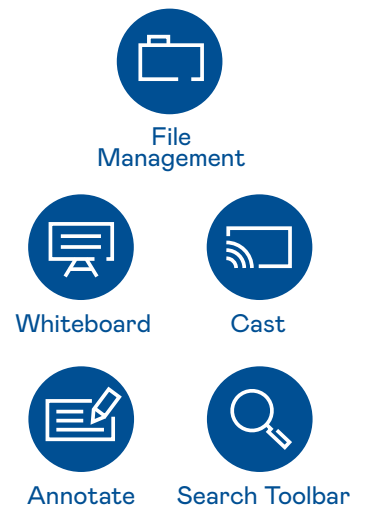
Whiteboard

Cast

Annotate

Search Toolbar

EShare App

With support for two-way mirroring, remote touch control, and file casting, you can wirelessly share content from any laptop, notebook, and mobile phone and enjoy wireless mouse, keyboard, and remote controller functionalities.

Google Search Widget

The home screen provides direct access to Google search, giving you the fastest way for searching the internet without having to open a browser app.

Convenience
By Design

Safeguard Application Compatibility

The OPS slot provides the flexibility to use Windows-based slot-in PCs. It enables users to easily switch and enjoy all kinds of software on Android and Windows systems without compatibility issues or having to connect additional PCs externally.

Connect Everything You Need

The series offers an extensive range of connectivity options such as USB, USB-C, DisplayPort, HDMI, VGA, RS-232 for you to connect any device. Streamline your setup through plug-n-play USB-C connection that delivers data, audio, video, and power via a single cable.

Display Port

PC

USB-C

HDMI

USB

VGA

RS-232

Ladybug

Coccinellidae is a widespread family of small beetles ranging in size from 0.8 to 18 mm (1/32–23/32 in). The family is commonly known as ladybugs in North America and ladybirds in Great Britain and other parts of the English-speaking world. Entomologists prefer the names ladybird beetles or lady beetles as these insects are not classified as true bugs.

Interactive Flat Panel Display - Education Series (UT)

65"   75"   86"

Specifications

Product			UT6501	UT7501	UT8601
Display	Size		65"	75"	86"
	Resolution		UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160
	Brightness		350 cd/m² (typ.)	400 cd/m² (typ.)	400 cd/m² (typ.)
	Contrast Ratio		1200:1 (typ.)	1200:1 (typ.)	1200:1 (typ.)
	Dynamic Contrast Ratio		4000:1	4000:1	4000:1
	Display Colors		8bit + FRC, 1.07B	8bit + FRC, 1.07B	8bit + FRC, 1.07B
	Color Gamut		72% NTSC (typ.)	72% NTSC (typ.)	72% NTSC (typ.)
	Viewing Angle (H/V)		178° / 178°	178° / 178°	178° / 178°
	Response Time		8ms (typ.)	8ms (typ.)	8ms (typ.)
	Frame Rate		60Hz	60Hz	60Hz
	Active Display	mm	1428.48 x 803.52	1649.66 x 927.94	1895.04 x 1065.96
		in.	56.24 x 31.63	64.95 x 36.53	74.61 x 41.97
	Backlight Type		Direct LED		
System	Processor		Cortex A73 1.8GHz Quad Core CPU		
	Memory		8GB		
	Storage		64GB		
	Operating System		Android 9.0		
Touch	Touch Type		IR		
	Response Time		≤8ms		
	Multi Touch Point		Up to 20 Points		
	Touch Accuracy		±1 mm		
	OS Support		Multi Touch (Windows 10/8/7, Android) Single Touch (Windows XP, Linux, Mac OS X, Chrome)		
Connectivity	Inputs		HDMI 2.0 x 3, DP 1.2a x 1, VGA x 1, Audio In x 1, Mic In x 1, RS-232 x 1		
	Outputs		Audio Out x 1, HDMI Out x 1		
	USB		USB2.0 Type-A x 1, USB3.0 Type-A x 4, USB3.0 Type-B (Touch) x 2, USB-C x 1		
	LAN		RJ-45 x 2		
Power	Power Supply		AC 100V ~ 240V, 50/60 Hz		
	Power Consumption		300W	380W	460W
	Standby Mode		< 0.5W		
Mechanical	Housing Material		Aluminum, Metal Plate		
	Housing Color		Black		
	Set Dimension	mm	1511.6 x 920.3 x 87.8	1722.5 x 1034.6 x 87.1	1967.9 x 1172.6 x 87.1
		in.	59.51 x 36.23 x 3.46	67.81 x 40.73 x 3.43	77.48 x 46.17 x 3.43
	Package Dimension	mm	1660 x 1045 x 245	1880 x 1160 x 280	2140 x 1340 x 280
		in.	65 x 41 x 10	74 x 46 x 11	84 x 53 x 11
	VESA Mount		600 x 400 mm	800 x 400 mm	800 x 400 mm

Dealer Stamp

AUO
AUO Display+