

Install


TKT105

3 Way 10" Full Range Loudspeaker for KTV Applications



- 3 way full range loudspeaker for KTV applications
- 150 Watts continuous, 600 Watts peak power
- High excursion 10" low frequency driver with low mass voice coil
- 4 wide dispersion 3 inch mid-high frequency drivers
- Precision engineered crossover for maximum performance in the midrange vocal region
- Tweeter overload protection circuit gives uninterrupted performance
- Internal rigging points allow standard bracket mount suspension and orientation
- 15 mm (5/8") wood enclosure with hard wearing PVC laminate finish
- Architecturally styled powder coated perforated steel mesh grille with foam backing
- Binding post screw terminal connectors for fast connection
- 10-Year Warranty Program*
- Designed and engineered in the U.K.

The 3-way full range TKT105 is a 600 Watt 10" loudspeaker system designed specifically for KTV applications. Engineered for permanent installation, TKT105's cabinet accommodates industry standard mounting brackets and is ideally suited for a wide range of listening environments.

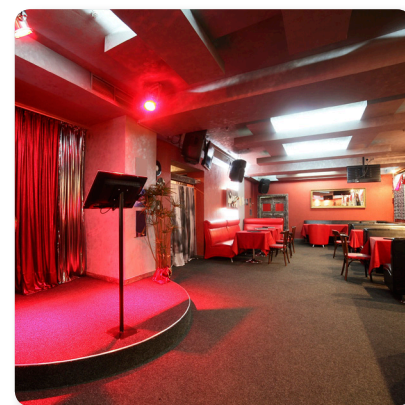

Precision and Detailed Clarity

The TKT105 loudspeaker features a 10" low frequency driver with a low mass voice coil for improved transient response, and 4 wide dispersion 3 inch mid-high frequency drivers with overload protection circuitry. All drivers are matched with a high-precision passive crossover network that provides maximum performance in the midrange vocal region. The rear panel carries binding post screw terminals for quick and convenient wiring.

Install

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

Rock Solid Construction

Finished in a PVC laminate finish, the 15 mm ($\frac{5}{8}$ ") wood cabinet also includes an architecturally styled powder coated perforated steel mesh grille backed with reticulated foam. Internal rigging points are provided for suspension or mounting with industry standard brackets - available separately.




You Are Covered

We always strive to provide the best possible Customer Experience. Our products are made in our own [MUSIC Tribe](#) factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous [Warranty program](#).


TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

Frequency Response Sensitivity 1 W / 1 m

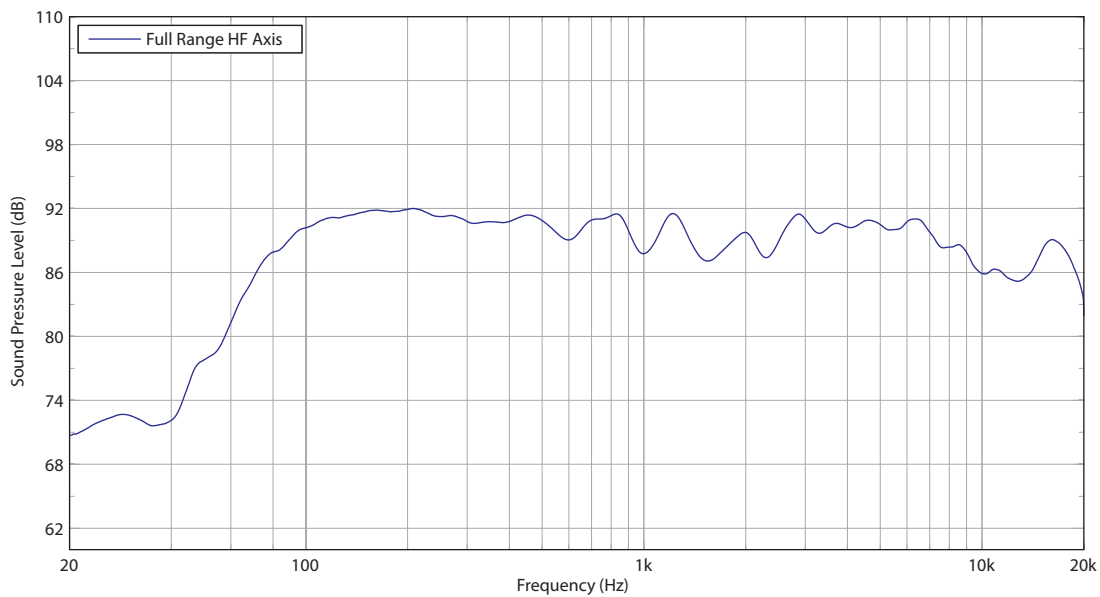


Impedance

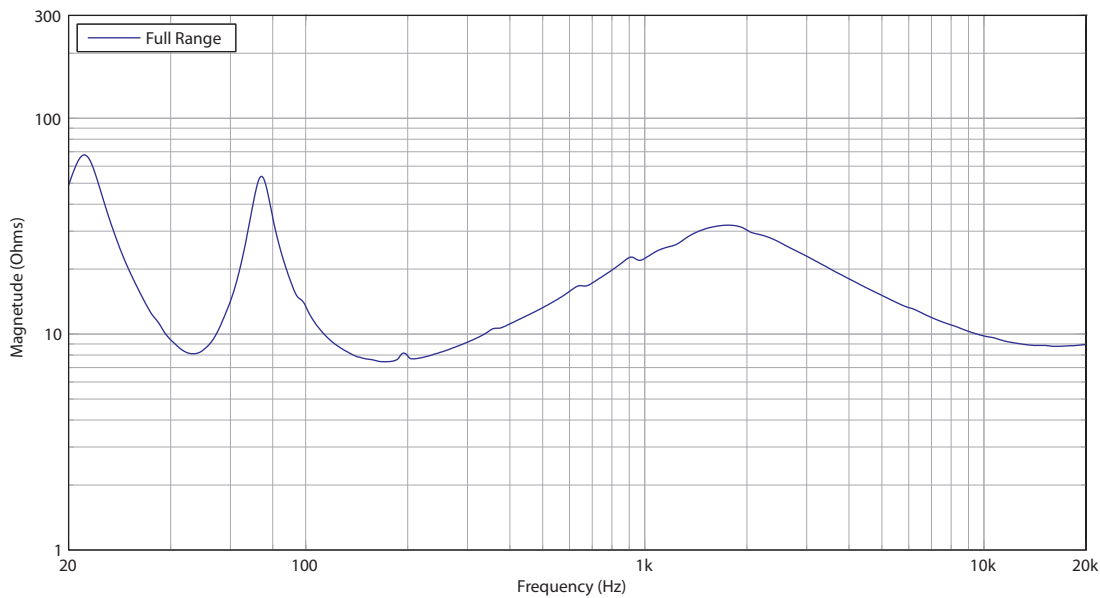


TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

Horizontal Beamwidth

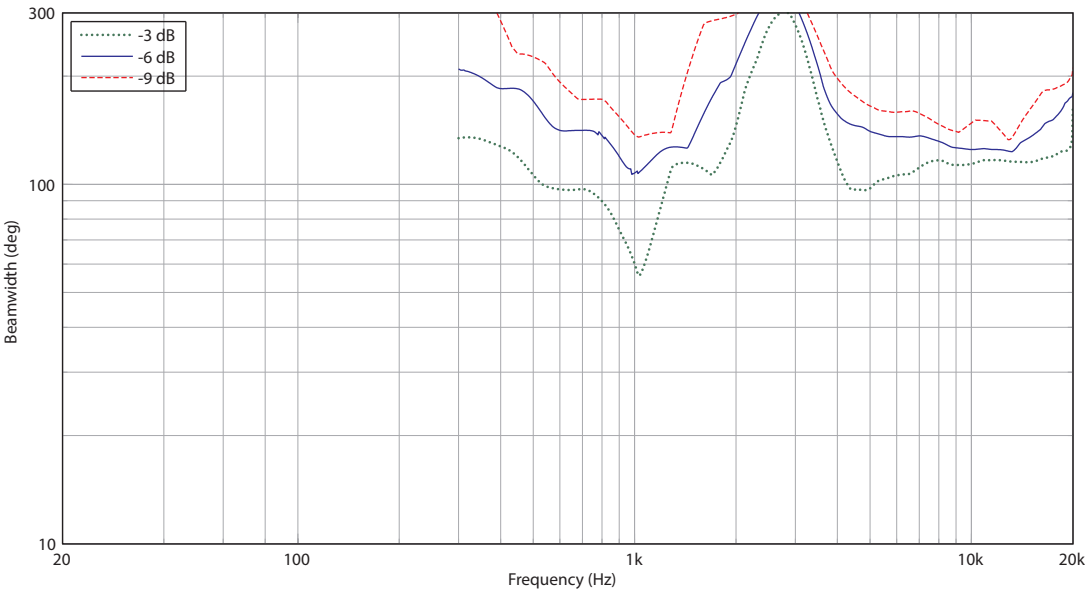






Vertical Beamwidth

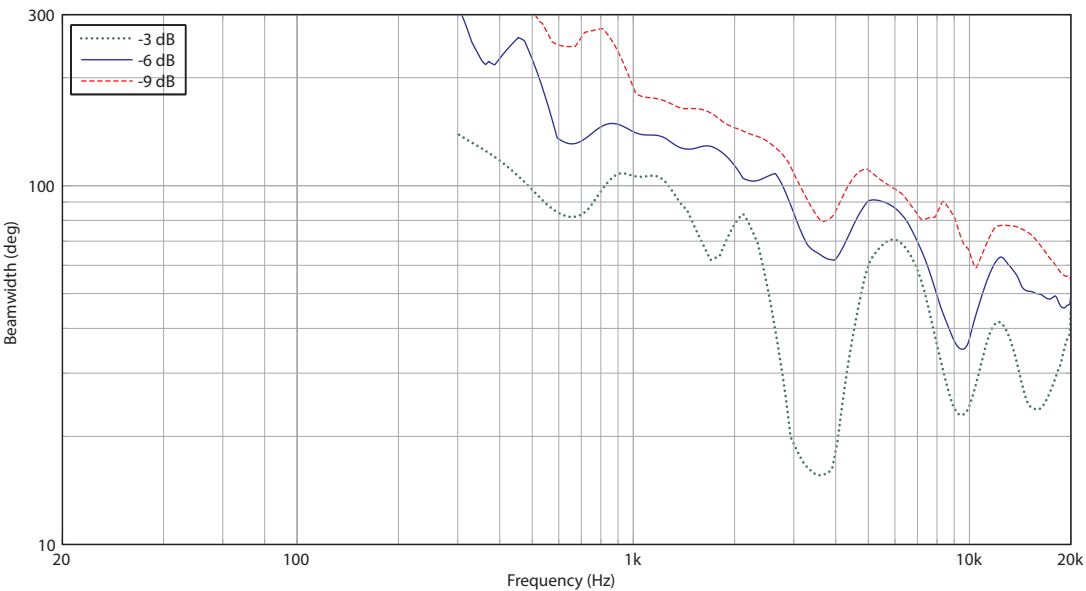

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications






Horizontal Polar Plots

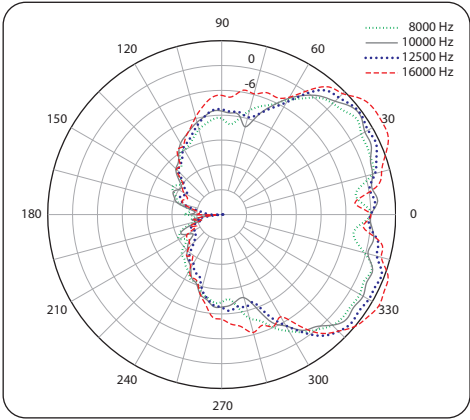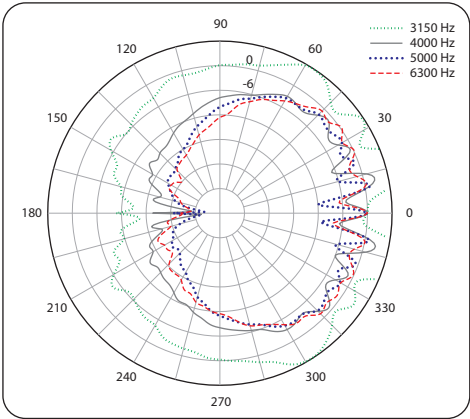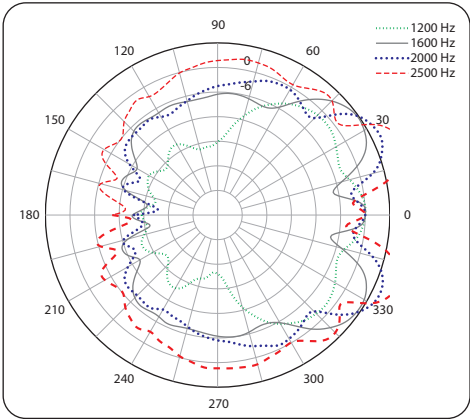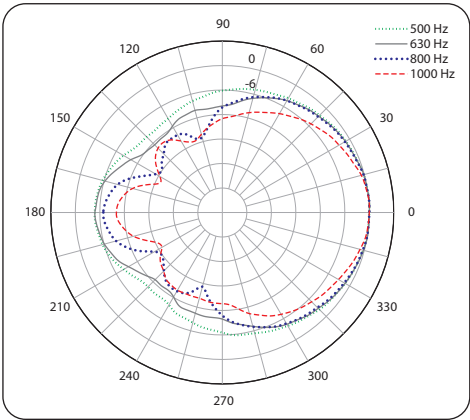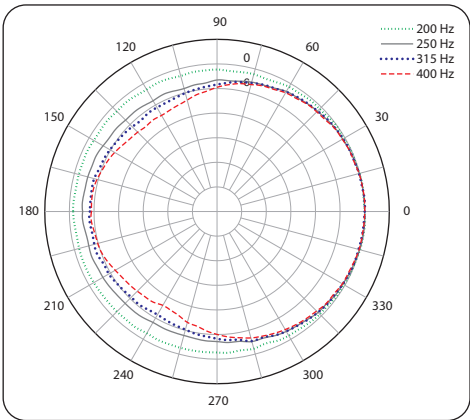

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

Vertical Polar Plots

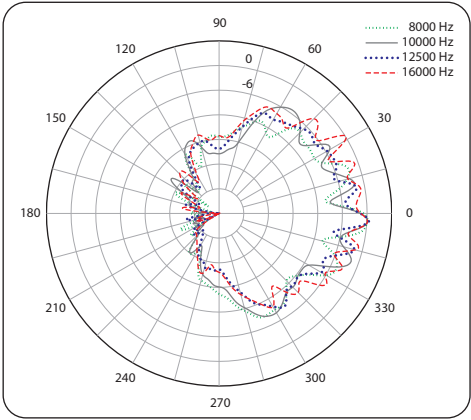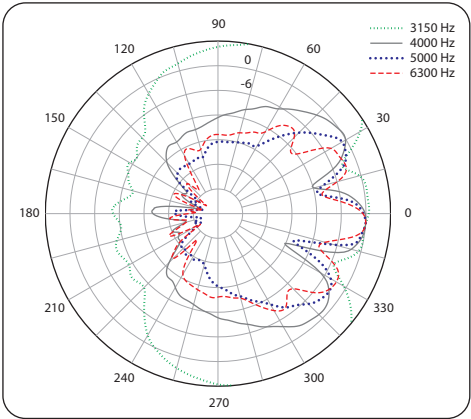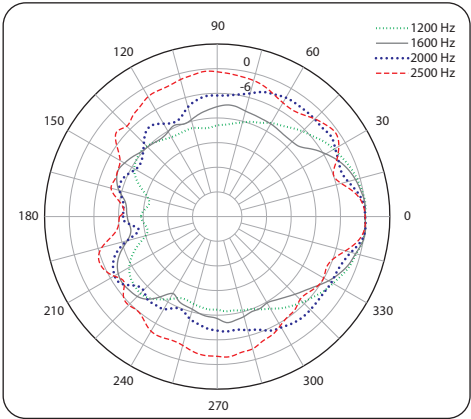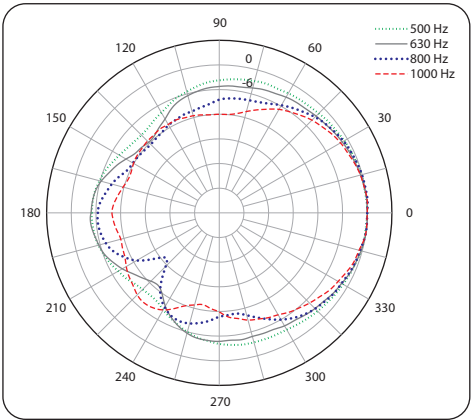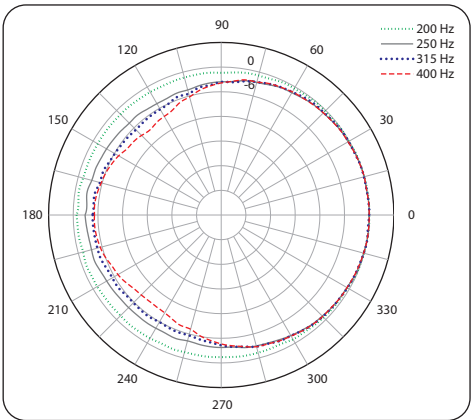


Install

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

Dimensions

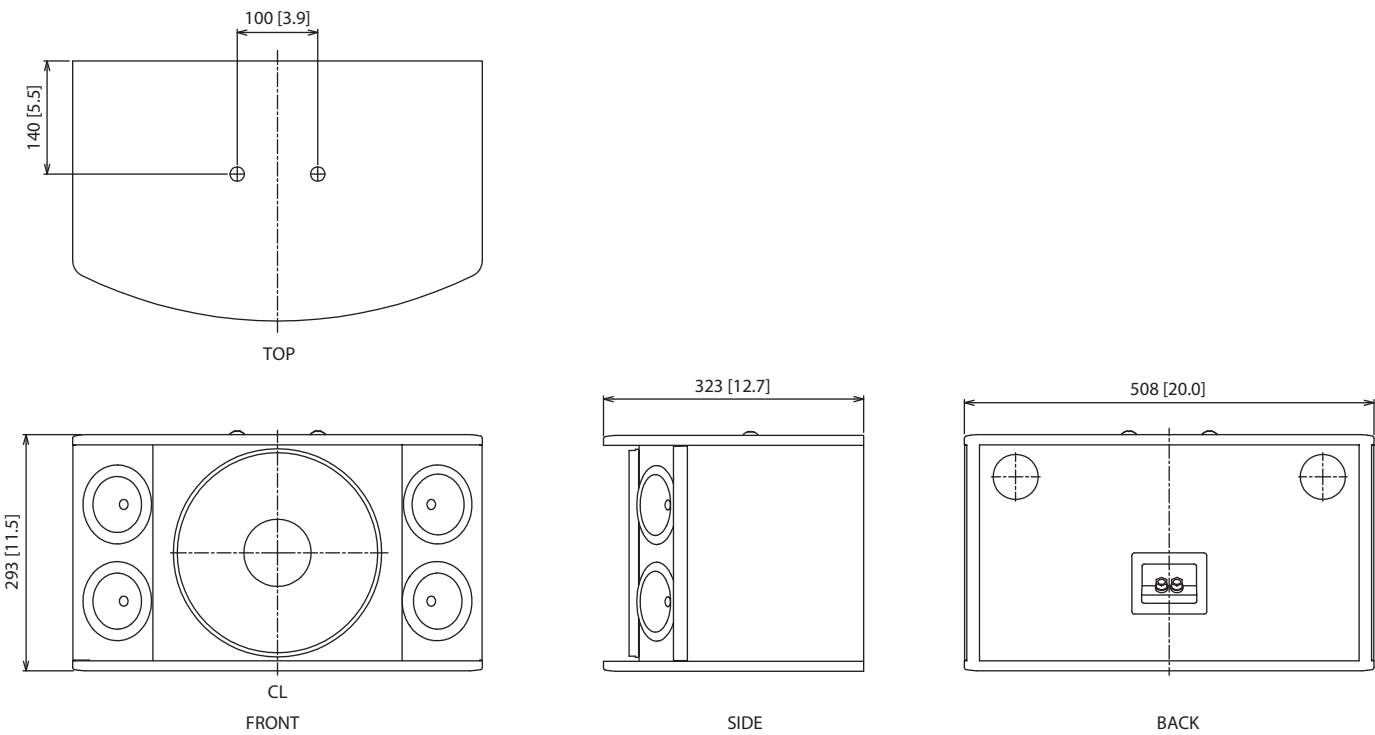

Install

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

Mounting and Rigging

The cabinet is fitted with M10 x 2 internally-threaded rigging points in the top panel, and it is compatible with industry standard brackets.

Install

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

Technical Specifications

System

Frequency response	65 Hz – 18 kHz ± 3 dB 45 Hz – 16 kHz -10 dB
Nominal dispersion	150° H x 80° V @ -6 dB points
Power handling (IEC)	150 W continuous, 600 W peak
Sensitivity	90 dB (1 W @ 1 m)
Maximum SPL	112 dB continuous, 118 dB peak
Impedance	8 Ω
Components	1 x 10" (259 mm) LF driver 4 x 3" (92 mm) HF cone paper

Enclosure

Connectors	Binding post screw terminals
Wiring	Red: positive, black: negative
Dimensions (H x W x D)	297 x 508 x 323 mm (11.7 x 20 x 12.7")
Net weight	12.4 kg (27.3 lbs)
Construction	15 mm (5/8") particle wood +12 mm (1/2") MDF wood
Finish	Semi matt black PVC laminating
Grille	Powder coated perforated steel
Flying hardware	M10 x 2

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications


Architecture & Engineering Specifications

The loudspeaker shall be of the full range, three-way passive type consisting of one 10" (259 mm) LF driver and four 3" (92 mm) MF/HF paper cone drivers. Performance specifications of a typical production unit shall meet or exceed the following: frequency response, measured with swept sine wave input, shall be flat within ± 3 dB from 65 Hz to 18 kHz and within -10 dB from 45 Hz to 16 kHz. Nominal dispersion, at -6 dB points, shall average 150° H x 80° V. Nominal impedance shall be 8 Ohms. Power handling shall be 150 Watts continuous, 600 Watts peak. Sensitivity, measured on axis, mean averaged over stated bandwidth, shall be 90 dB, 1 Watt @ 1 metre. Maximum SPL (peak), measured at 1 metre with music program at stated amplifier input, shall be 118 dB. Dimensions: 297 mm high x 508 mm wide x 323 mm deep (11.7" x 20.0" x 12.7"). Net weight: 12.4 kg (27.3 lbs). The loudspeaker system shall be the [TANNOY](#) TKT105. No other loudspeaker shall be acceptable unless submitted data from an independent test laboratory verifies that the above combined performance / size specifications are equalled or exceeded.

Install

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications

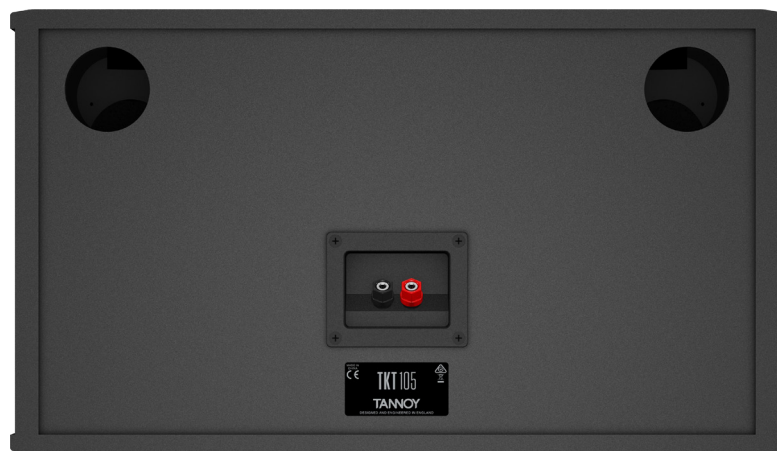

Install

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications



Install

TKT105

3 Way 10" Full Range Loudspeaker for
KTV Applications



For service, support or more information contact the TANNOY location nearest you:

Europe
MUSIC Tribe Brands UK Ltd.
Tel: +44156 273 2290
Email: CARECrea@music-group.com
CAREEnte@music-group.com
CARELife@music-group.com

USA/Canada
MUSIC Tribe Commercial NV Inc.
Tel: +1 702 800 8290
Email: CARECrea@music-group.com
CAREEnte@music-group.com
CARELife@music-group.com

Japan
MUSIC Tribe Services JP K.K.
Tel: +81 3 6231 0453
Email: CARECrea@music-group.com
CAREEnte@music-group.com
CARELife@music-group.com

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Group IP Ltd.
© MUSIC Group IP Ltd. 2018 All rights reserved.

TANNOY