

SUB 8006-AS

ACTIVE HIGH POWER SUBWOOFER

DESCRIPTION

The SUB 8006-AS is the largest and most powerful active sub woofer in the professional series. Featuring two 18" transducers, with 4" inside/outside voice coils, this cabinet is designed to delivery a serious amount of low frequency. Powered by a 2500W digital amplifier module, the SUB 8006-AS can perform in the most demanding situations.



FEATURES

- 5000 Watt Peak power - 2500 Watt RMS
- 141 dB max SPL
- 30 Hz - 120 Hz frequency response
- 2 x 18" Woofer
- DSP controlled Input section with selectable presets
- Delay control
- Integrated mechanics for multiple configuration with HDL 20-A
- Baltic birch tour grade cabinet



TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response:	30 Hz ÷ 120 Hz
	Max SPL @ 1m:	141 dB
Transducers	Woofers:	2 x 18", 4.0" v.c
Input/Output section	Input signal:	bal/unbal
	Input connectors:	XLR
	Output connectors:	XLR
	Input sensitivity:	-2 dBu/+4 dBu
Processor section	Hi-Pass Frequencies:	100 Hz
	Low-Pass Frequencies:	80 Hz
	Protections:	Thermal, RMS
	Limiter:	Fast Limiter
	Controls:	Xover, Phase switch, Depp/Punch, Output Delay Settings, Cardioi
Power section	Total Power:	5000 W Peak, 2500 W RMS
	Low frequencies:	5000 W Peak, 2500 W RMS
	Cooling:	Convection
	Connections:	Powercon IN/OUT
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Baltic birch plywood
	Hardware:	Mounting points
	Handles:	4 side
	Grille:	Steel
	Color:	Black
Size	Height:	709 mm / 27.91 inches
	Width:	1109 mm / 43.66 inches
	Depth:	700 mm / 27.56 inches
	Weight:	96.4 kg / 212.53 lbs
Shipping informations	Package Height:	763 mm / 30.04 inches
	Package Width:	1156 mm / 45.51 inches
	Package Depth:	753 mm / 29.65 inches
	Package Weight:	109 kg / 240.3 lbs

PART NUMBER

- 13000373**

SUB 8006-AS

115V





EAN 8024530009861

- 13000372**

SUB 8006-AS

220-240V

EAN 8024530009854

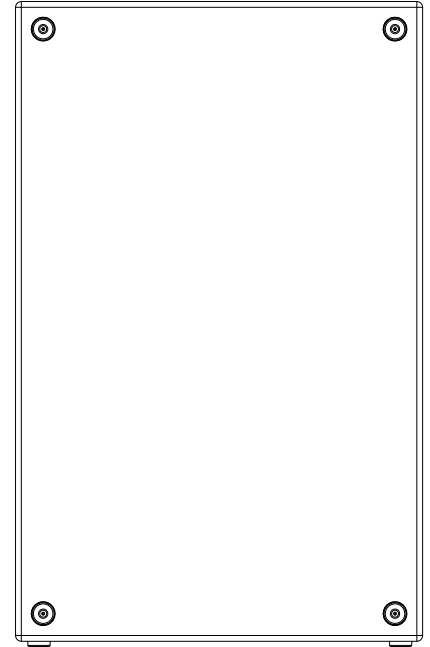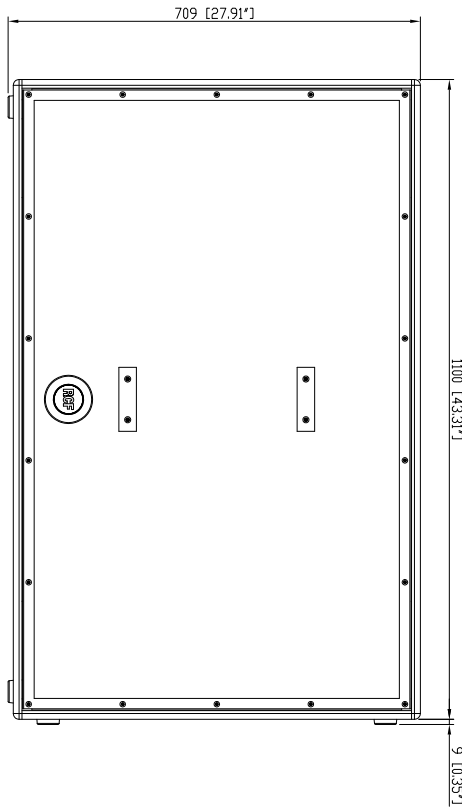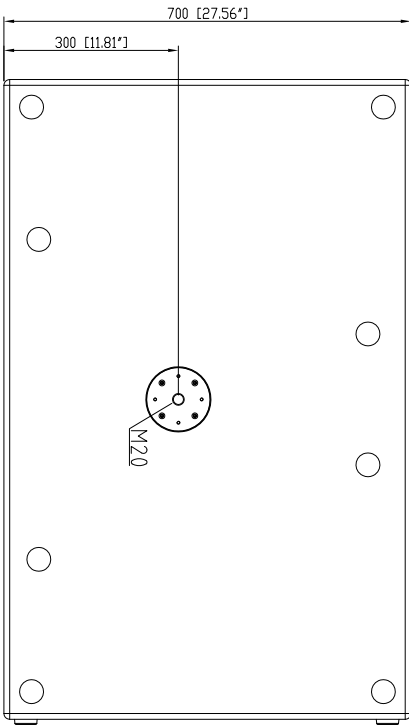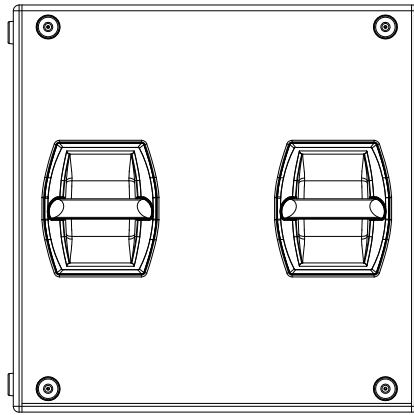

SUB8006-AS

