

NTK

Multi Award Winning Class A Dual 1" Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664



Features


- Large 1" (25mm) capsule with gold plated diaphragm
- Class "A" valve circuitry
- Hand selected and graded 6922 twin-triode valve
- Dedicated power supply
- Internal capsule shock mounting
- High level of RF rejection
- Ultra low noise
- Wide dynamic range
- High strength heat treated steel mesh head
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at www.rodemic.com/warranty

Specifications


| | |
|---------------------|---|
| Acoustic Principle | Pressure gradient |
| Directional Pattern | Cardioid |
| Frequency Range | 20Hz ~ 20,000Hz |
| Sensitivity | -38dB \pm 2dB re 1V/Pa (12mV @ 94 dB SPL) @ 1kHz |
| Nominal Impedance | 200 Ω |
| Equivalent Noise | 12dBA SPL (A - weighted per IEC651) |
| Maximum Output | +29dBu (@ 1% THD into 1k Ω) |
| Dynamic Range | >147dB (per IEC651) |
| Maximum SPL | >158dB (@ 1kHz, 1% THD into 1k Ω load) |
| Signal/Noise | >82dB SPL (A - weighted per IEC651) |
| Power Req. | Dedicated Power Supply (100 ~ 120V/200 ~ 240V, 50/60 Hz) |
| Dimensions | Length - 208mm Diameter - 55mm |
| Output Connection | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) |
| Shipping Weight | 7.08kg |
| Net Weight | 760g |

Incl. Accessories


- RM2 stand mount
- RC2 case
- Transformer and lead

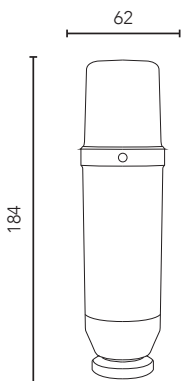

Polar Pattern



Frequency Response

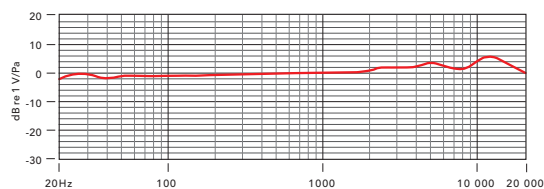

RØDE
MICROPHONES

