DIRECTIONAL CONDENSER MICROPHONE

The SR-NV5X fits in many environments for applications such as DSLR video making, ENG, filmmaking, field recording, sound design, and broadcast applications.

Specifications


Polar pattern	Cardioid
Frequency Response	40-18000Hz ±3dB
Sensitivity	- 35dB ±1dB /0dB=1V/Pa, 1kHz
Signal to Noise Ratio	80dB or more
Output Impedance	2000 Ohm or morephantom
Power	48V phantom
Plug	3-pin XLR plug
Dimensions	21*21*536mm (cable included)
Weight	96g (3.3 oz.)




Broadcast sound quality Low noise circuitry Rugged metal construction

Packing List

SR-NV5X Microphone Foam windshield Furry windshield

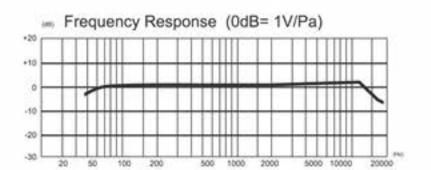



www.saramonic.com

The Saramonic logo is trademark which is registered and owned by Saramonic International. COPYRIGHT 2011-2021 SARAMONIC INTERNATIONAL (A brand of DSQN) Email: info@saramonic.com

