

Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with Dual Concentric Driver for Installation Applications (Pre-Install)

- Full range ceiling loudspeaker for installation applications
- 90 Watts continuous, 360 Watts peak power
- Next generation 8" Dual Concentric driver featuring Omnimagnet technology
- Torus Ogive waveguide for improved high frequency response and directivity
- Pre-install version supplied without back can (available separately)
- UL 1480 certified for general signalling systems
- UL 2043 certified for air-handling spaces
- Multiple transformer taps for 70 V and 100 V line systems or 16 Ohm direct input
- Low insertion loss 60 W line transformer with easily accessible tapping switch
- Optimised for LAB GRUPPEN low impedance LUCIA amplifiers with up to 8 CMS series loudspeakers per channel
- Semi matt white finish fits unobtrusively in any environment
- Powder coated UV resistant perforated steel mesh grille with dust protection
- Removable magnetic grille for custom painting
- Optional ARCO designer grilles available for minimal architectural impact

The CMS 803DC PI is a full bandwidth 360-Watt high sensitivity loudspeaker that utilises our third generation Ceiling Monitor System technology (CMS 3.0). Thanks to an all-new proprietary 8" Dual Concentric point-source driver with Omnimagnet technology on a Torus Ogive Waveguide, the UL certified CMS 803DC PI delivers wide and consistent broadband directivity with enhanced intelligibility – plus highly accurate and linear response.



Optimised for Installation

Specifically designed with a self-aligning 5 way clamp system for fast, simple and cost effective installation, CMS 803DC PI also features extra clamp extension to accommodate thicker ceiling panels, and a locking design that prevents over-tightening. A low-insertion loss 60 W transformer with convenient front panel tap switching, paintable powder coated steel mesh grille with dust protection, two tile support rails and one C-ring are all included. An Arco style grille, which conceals the entire unit for aesthetic purposes, back can, and plaster (mud) ring are available separately.

Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with Dual Concentric Driver for Installation Applications (Pre-Install)

- Self-aligning 5 way clamp mounting system
- Mounting C-ring and ceiling tile rails included
- 10-Year Warranty Program*
- Designed and engineered in England

LAB GRUPPEN Ready

The CMS 803DC PI is finished in semi matt white and optimised for use with **LAB GRUPPEN LUCIA** amplifiers, which accommodate up to 8 CMS Series loudspeakers per channel.



You Are Covered

We always strive to provide the best possible Customer Experience. Our products are made in our own **MUSIC Tribe** factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world.

As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous **Warranty program**.


Install

CMS 3.0


CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)

Frequency Response Sensitivity 1 W / 1 m

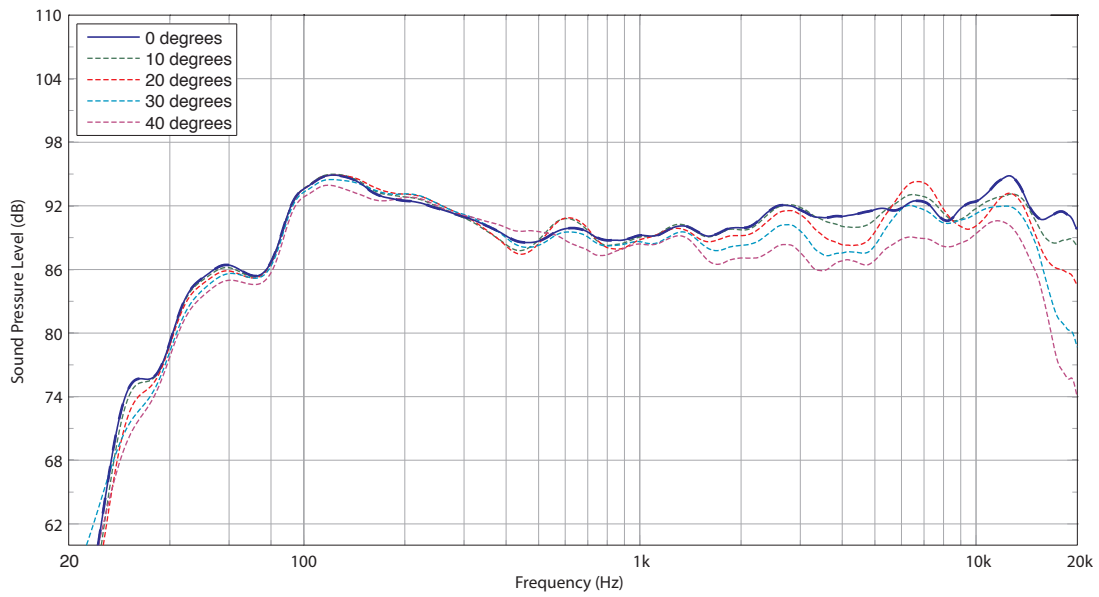

Impedance

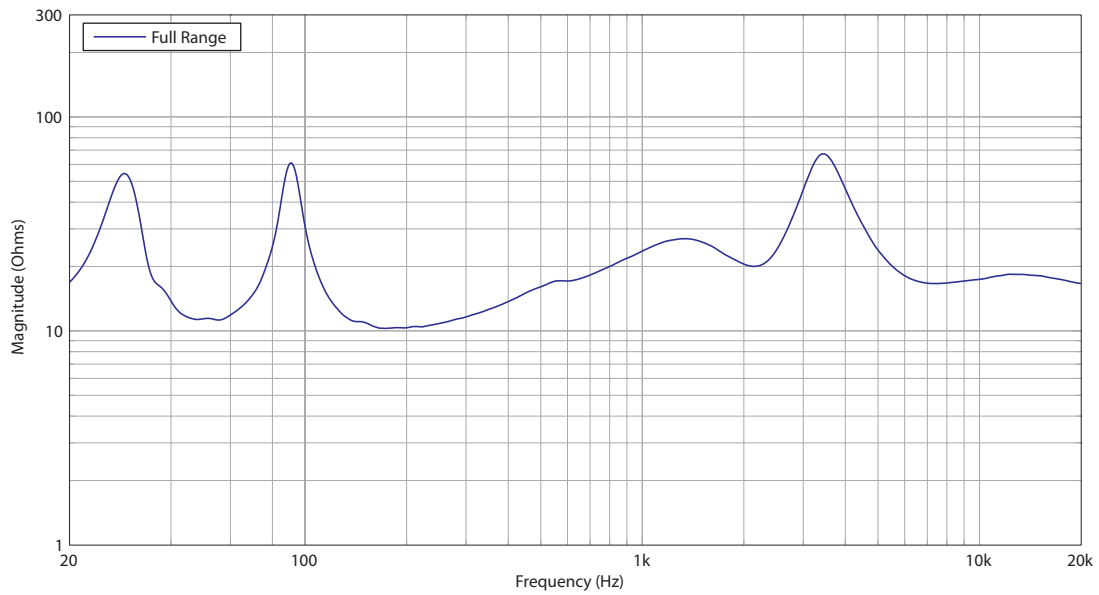


Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)

Horizontal Beamwidth

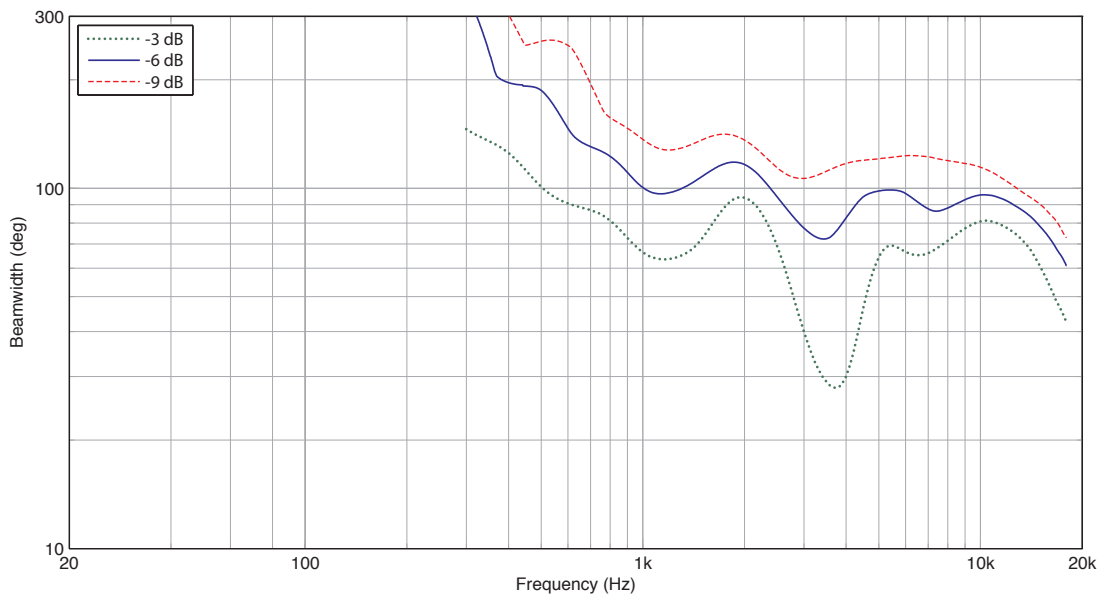






Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)

Polar Plots

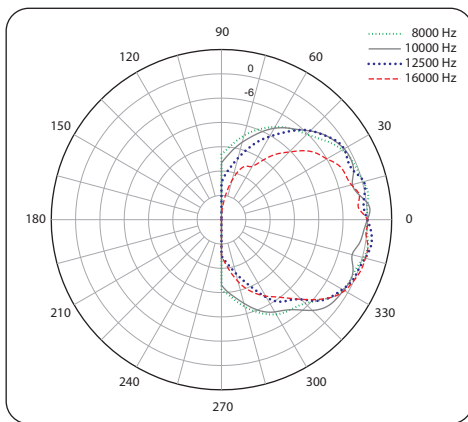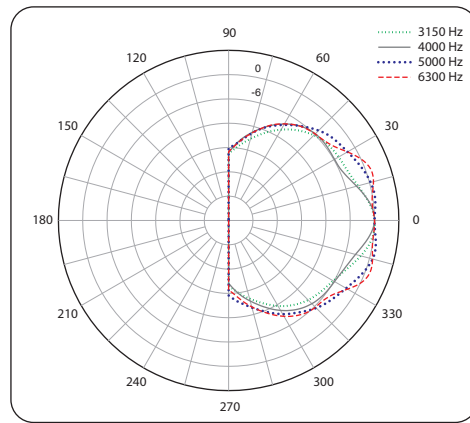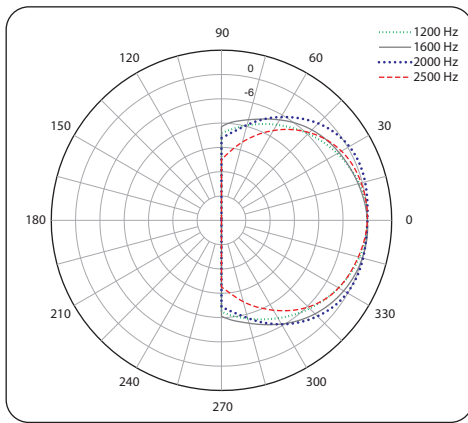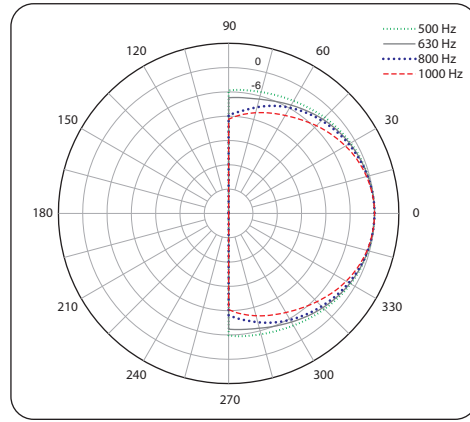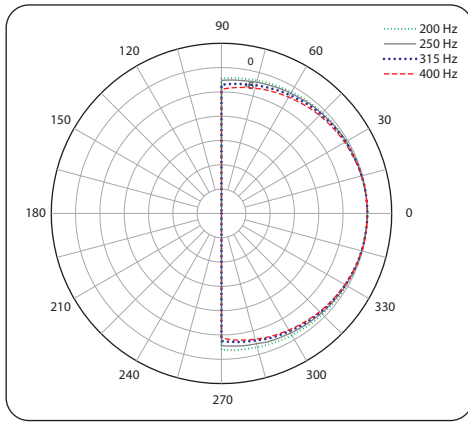




Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)

Dimensions

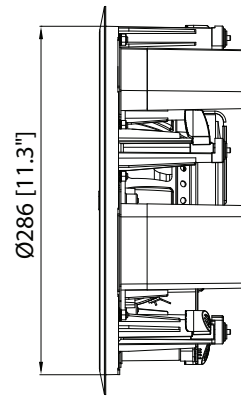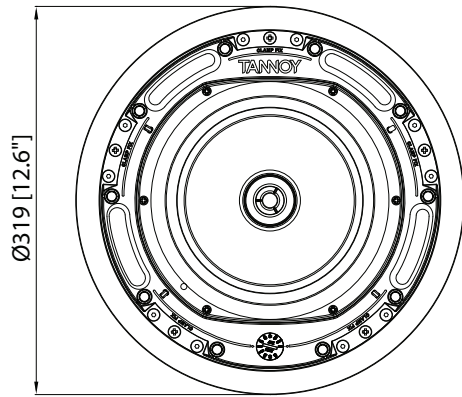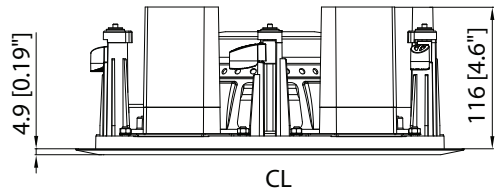

Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)

Technical Specifications

Performance

Frequency response (-3 dB) ⁽¹⁾	47 Hz - 30 kHz BM Backcan
Frequency range (-10 dB) ⁽¹⁾	40 Hz - 35 kHz BM Backcan
Frequency range (-10 dB) ⁽¹⁾	41 Hz - 35 kHz PI Backcan
System sensitivity (1 W @ 1 m) ⁽²⁾	92 dB (1 W = 4 V for 16 Ohms)
Nominal coverage angle	90 degrees conical
Power handling ⁽³⁾	
Average	90 W
Programme	180 W
Peak	360 W
Recommended amplifier power	180 W @ 16 Ohms
Nominal impedance (Lo, Z)	16 Ohms
Rated maximum SPL	
Average	112 dB
Peak	118 dB
With THP60 - average	110 dB
Transformer taps (via front rotary switch)	
70 V	60 W (83 Ω) / 30 W (165 Ω) / 15 W (330 Ω) / 7.5 W (660 Ω) / OFF & low impedance operation
100 V	60 W (165 Ω) / 30 W (330 Ω) / 15 W (660 Ω) / OFF & low impedance operation

Transducers

Dual concentric point source driver	1 x 200 mm (8.0") Dual Concentric driver, using Omnimagnet technology
Low frequency	44 mm (1.75") voice coil, treated multi fiber paper pulp cone
High frequency	25 mm (1.00") PEI dome

Physical

Enclosure	
Backcan	Zinc plated steel
Baffle	Reflex loaded UL 94V-0 rated ABS
Grille	Steel, with weather resistant coating
Safety features	Safety ring located at rear of enclosure for load bearing safety bond
Clamping design	Security toggle clamp Min / Max clamping range 9.5 mm (0.37") / 60 mm (2.36") Recommended clamp torque: 1.5 Nm
Backcan options	
Blind mount (BM)	Complete with fixed backcan
Pre install (PI)	Separate backcan for pre-installation
Cable entry options	Cable clamp & squeeze connector for conduit up to 22 mm
Conduit knockouts on PI Backcan	3 Sets of horizontal positions 19 / 22 / 28 mm (0.75" / 0.87" / 1.10")
Connectors	Removable locking connector with screw terminals with "loop through" facility
Compliance	UL-1480, UL-2043, CE

Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)

Physical

Dimensions

Bezel diameter	319.0 mm (12.56")
Front of ceiling to rear of backcan	—
Front of ceiling to top of safety loop	—
BM model: Front of ceiling to rear of backcan	310.5 mm (12.22")
BM model: Front of ceiling to top of safety loop	327.7 mm (12.90")
PI model: Front of ceiling surface to rear of speaker unit	125.6 mm (4.94")
PI model: Front of accessory backcan bezel to top of safety loop	168.5 mm (6.63")
Hole cutout diameter (all models)	295 mm (11.61")
Net weight (ea)	
CMS 803DC BM	8.5 kg (18.74 lbs)
CMS 803DC PI	5.0 kg (11.02 lbs)
PI Backcan	3.7 kg (8.1 lbs)
Included accessories	C-Ring, tile-bridge kit, paint mask, cut-out template, grille
Optional accessories	Plaster (mud) ring, Arco grille
Packed quantity	2

Notes

- (1) Average over stated bandwidth. Measured in an IEC baffle in an Anechoic Chamber
- (2) Unweighted pink noise input, measured at 1 metre on axis
- (3) Long term power handling capacity as defined in EIA - 426B test

A full range of measurements, performance data, CLF and Ease Data for CMS 803DC/CMS 803DCQ can be downloaded from www.tannoypro.com.

TANNOY operates a policy of continuous research and development. The introduction of new materials or manufacturing methods may introduce variations in actual performance; however, actual performance always will equal or exceed the published specifications, which TANNOY reserves the right to alter without prior notice. Please verify the latest specifications when dealing with critical applications.

Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)



Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)



Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)



Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)



Install

CMS 3.0

CMS 803DC PI

8" Full Range Ceiling Loudspeaker with
Dual Concentric Driver for Installation
Applications (Pre-Install)

MADE IN CHINA

SUSPENDING THIS SYSTEM SHOULD ONLY BE DONE BY QUALIFIED PERSONS FOLLOWING SAFE INSTALLATION STANDARDS

UL Type:G
US 3PHS
LISTED

CE

RoHS

WEEE

SPEAKER: CMS 803DC PI

WIRING	PASSIVE
1+ / 2-	INPUT
3- / 4+	LINK
INPUT	POWER
70 V LINE	7.5, 15, 30, 60 W
100 V LINE	15, 30, 60 W
16 Ω	180 W PROGRAM

REFER TO INSTALLATION WIRING DIAGRAM IN QUICK START GUIDE

TANNOY

DESIGNED AND ENGINEERED IN THE U.K.



For service, support or more information contact the TANNOY location

Europe
MUSIC Tribe Brands UK Ltd.
 Tel: +44156 273 2290
 Email: CARECrea@music-group.com
 CAREEnte@music-group.com
 CARELife@music-group.com

USA/Canada
MUSIC Tribe Commercial NV Inc.
 Tel: +1 702 800 8290
 Email: CARECrea@music-group.com
 CAREEnte@music-group.com
 CARELife@music-group.com

Japan
MUSIC Tribe Services JP K.K.
 Tel: +81 3 6231 0453
 Email: CARECrea@music-group.com
 CAREEnte@music-group.com
 CARELife@music-group.com

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Tribe Global Brands Ltd. © MUSIC Tribe Global Brands Ltd. 2018 All rights reserved.

