

### DESCRIPTION

The MP-210-AS monitor panel comes with a speaker and LED display, and allow of the overall operation of an equipment rack. Up to 10 amplifiers output levels can be selected and monitored.


### SPECIFICATIONS

Power Requirements	24 V DC
Current Consumption	30 mA
Input	10 zones high impedance level : 100V Line Level line : 40 dBV (100V)
Speaker Component	30 x 70 mm cone speaker 6 W/ 8Ω
Monitor level	6-point LED display
Control Panel	Channel selector switch, Volume control switch
Color	Front panel : Black, Chassis and case : natural SECC
Dimesions	482 (W) x 44 (H) x 116.4 (D) mm (18.98"x1.73"x4.58")
Weight	Approx. 1.1 kg (2.43 lb)
Accessory	Removable terminal plug (2 pins)...10


### Notes:

- o The design and specifications are subject to change without notice for improvement.


### APPEARANCE



Rear View



Side View

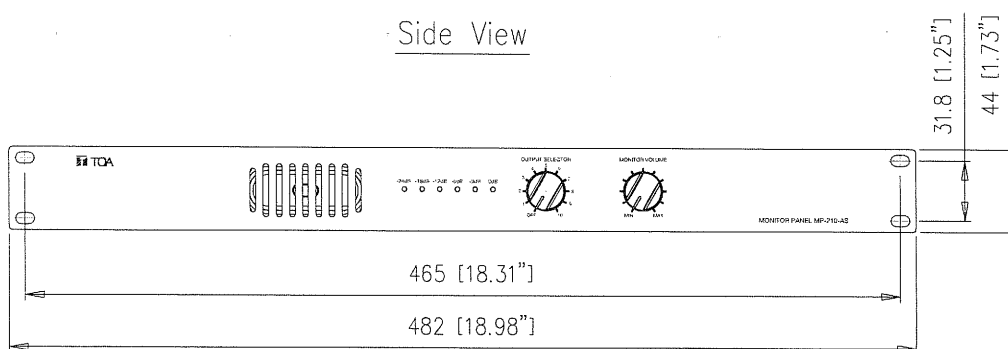

Front View