

Portable Speakers

MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

- 2 way full range loudspeaker for portable PA and installation applications
- 1,200 Watts continuous, 4,800 Watts peak power
- Ideal for FOH, side and drum fill applications
- Carbon fibre loaded 15" low frequency drivers with inside/outside wound coil
- Titanium dome 1.4" neodymium motor compression driver
- Switchable passive/bi-amp operation for flexibility of use
- Low distortion waveguide provides 75° H x 50° V dispersion
- 15 mm (5/8") birch plywood enclosure with hard wearing semi matt black paint finish
- Rugged powder coated perforated steel mesh grille
- Durable handles for easy lifting and carrying
- Multiple internal rigging points for installation applications
- Neutrik speakON* NL4 connectors for reliable long life operation
- 3-Year Warranty Program*
- Designed and engineered in England

The 2 way full range TMS153 is a switchable passive/bi-amp 15" 4,800 Watt loudspeaker system is ideally suited for a wide range of portable speech and music sound reinforcement applications. Designed to work in conjunction with **TURBOSOUND** loudspeaker management systems, the TMS153 provides optimal sonic performance for FOH, side and drum fill applications that demand very high output levels.

The TMS153 loudspeaker features dual carbon fibre loaded 15" low frequency drivers with inside/outside wound coil with low mass voice coil for improved transient response, and a titanium dome 1.4" neodymium motor compression driver mounted on a 75° horizontal by 50° vertical low distortion waveguide. All drivers are matched with an internal passive crossover network in a reflex-loaded enclosure, and bi-amp mode can be enabled by means of a rear panel switch.

Finished in a highly durable semi matt black paint, the cabinet is constructed from 15 mm (5/8") birch plywood, and includes a rugged powder coated perforated steel mesh grille backed with reticulated foam. The TMS153 utilises durable handles for portability, and is equally suited for permanent install applications. A rear panel connector plate carries two Neutrik speakON* NL4 connectors for input and link connections to additional enclosures.



Portable Speakers

MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications



You Are Covered

We always strive to provide the best possible Customer Experience. Our products are made in our own **MUSIC Group** factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world.


As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous **3-Year Warranty program**.

Portable Speakers


MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

Frequency Response Sensitivity 1 W / 1 m

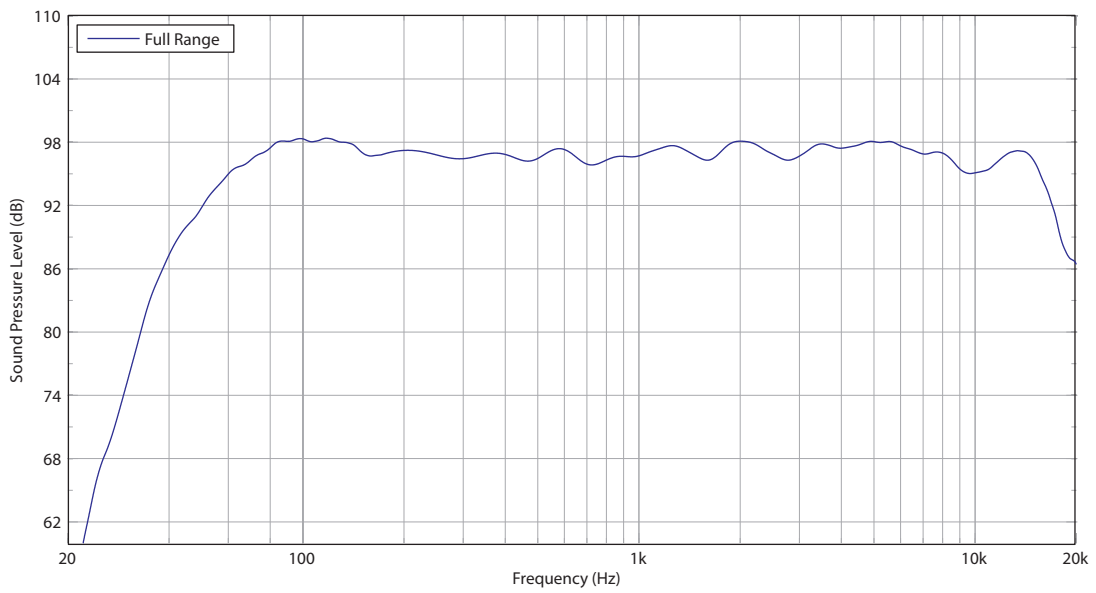

Impedance

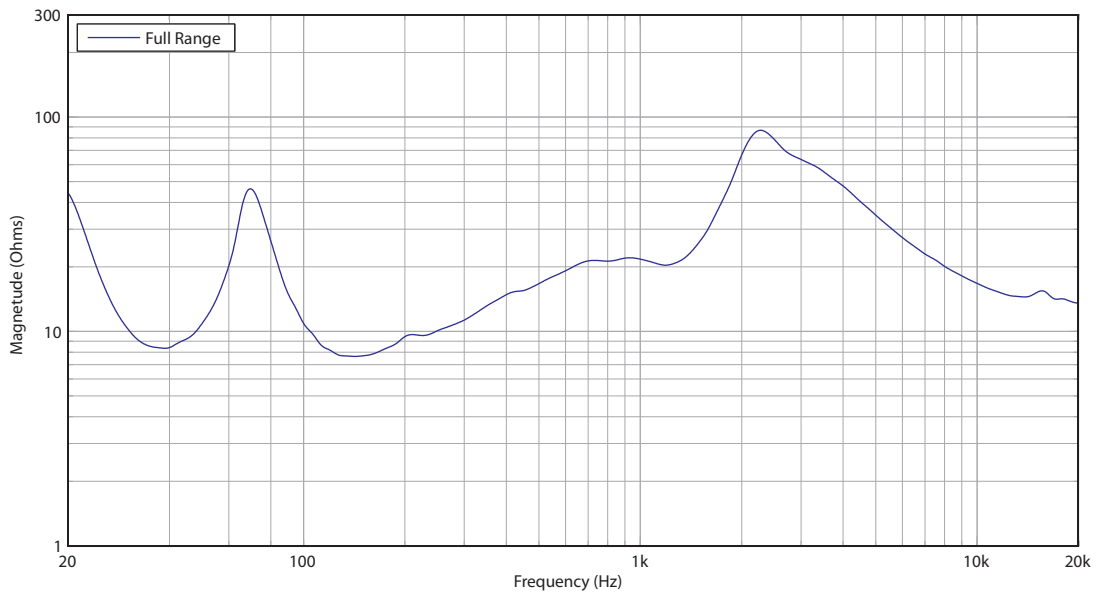


Portable Speakers


MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

Horizontal Beamwidth

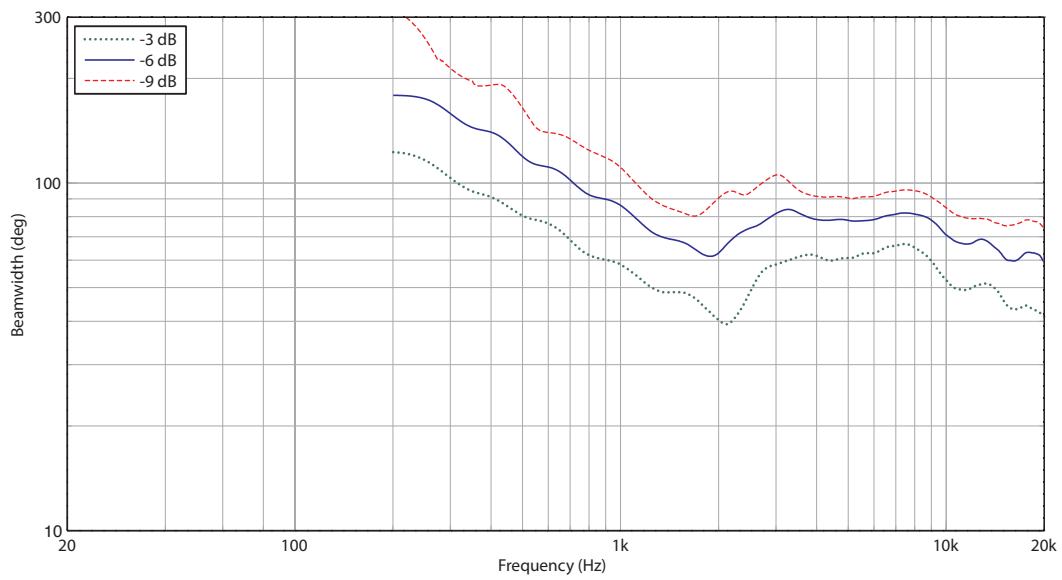

Vertical Beamwidth





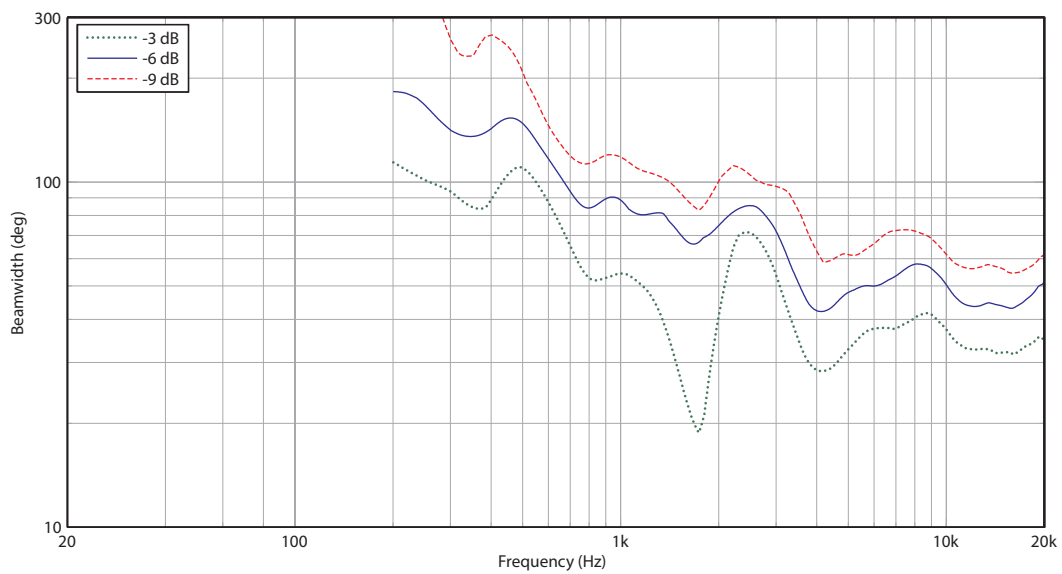


Portable Speakers

MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

Horizontal Polar Plots

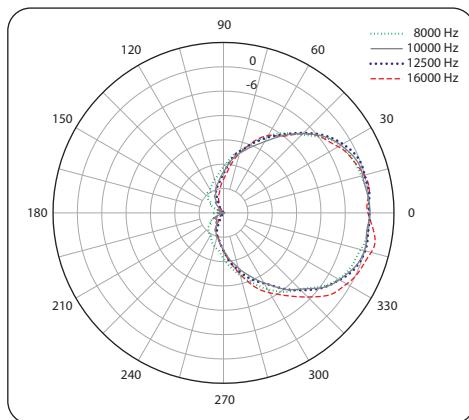
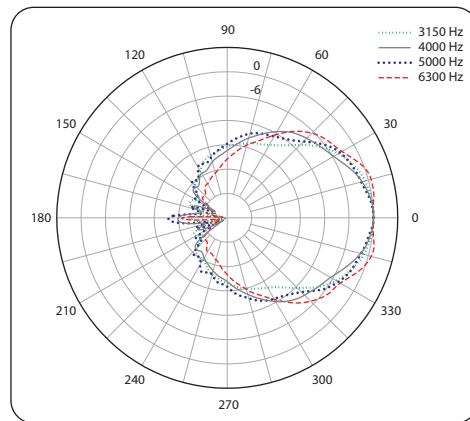
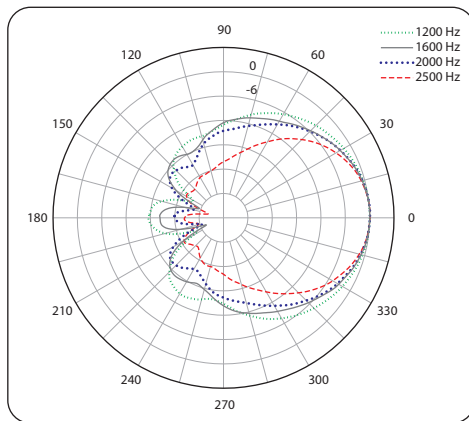
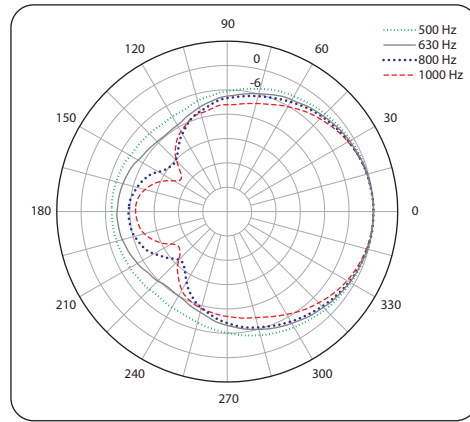
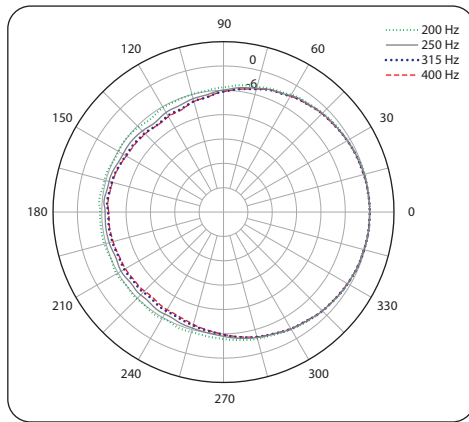


Portable Speakers

MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

Vertical Polar Plots

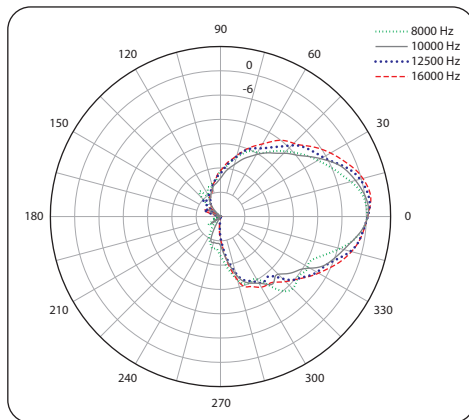
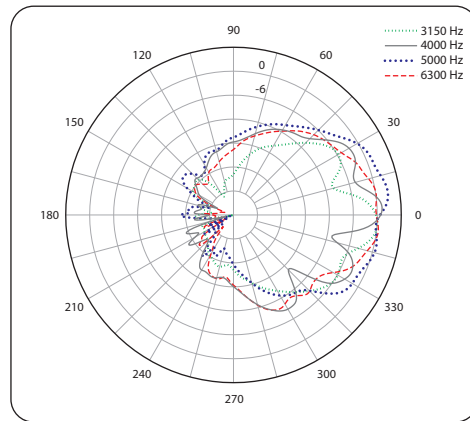
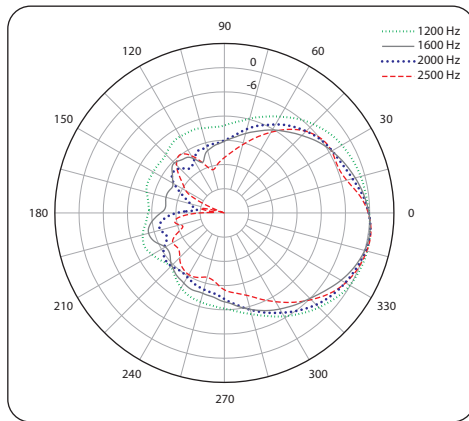
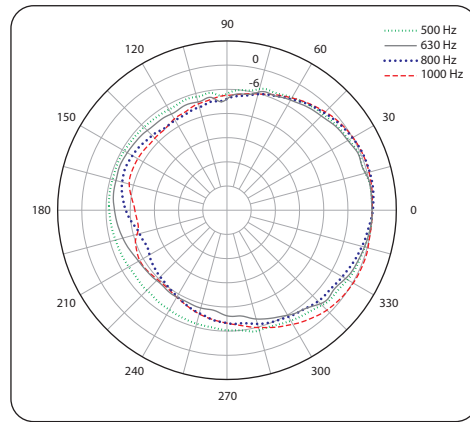
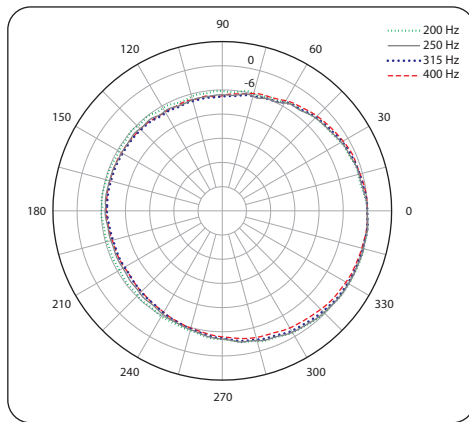


Portable Speakers

MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

Dimensions

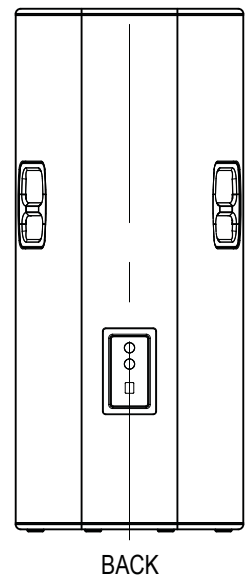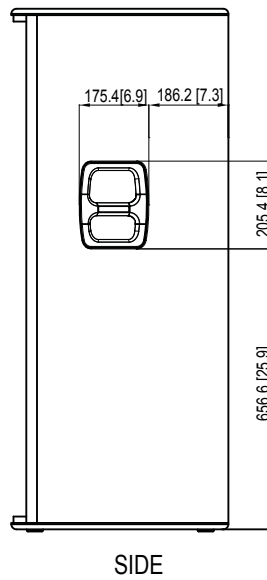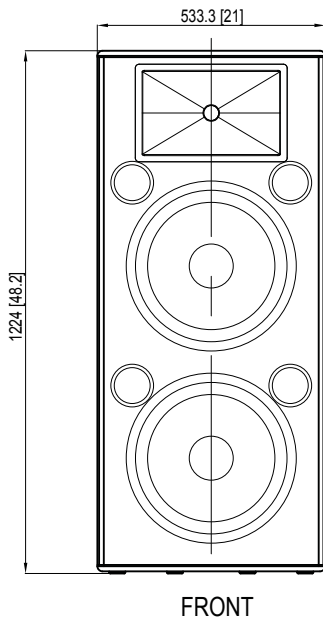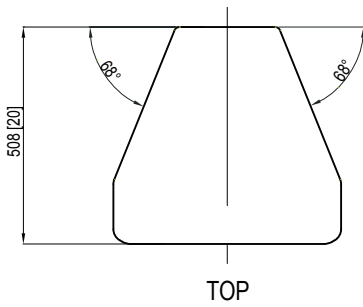

Portable Speakers

MADRID

TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

Technical Specifications

System

Frequency Response	50 Hz – 20 kHz \pm 3 dB 37 Hz – 20 kHz -10 dB
Nominal Dispersion	75° H x 50° V @ -6 dB points
Directivity Factor (Q)	12.8
Directivity Index (DI)	11.1
Power Handling (IEC)	
Passive	1,200 W continuous, 4,800 W peak
Bi-amp	LF: 1,200 W continuous, 4,800 W peak HF: 75 W continuous, 300 W peak
Sensitivity	99 dB (1 W @ 1 m)
Maximum SPL	
Passive	130 dB continuous, 136 dB peak
Bi-Amp	LF: 130 dB continuous, 136 dB peak HF: 128 dB continuous, 134 dB peak
Impedance	
Passive	4 Ω
Bi-Amp	LF: 4 Ω HF: 6 Ω
Crossover Type	Passive / bi-amp, switchable
Components	2 x 15" (394 mm) LF driver 1 x 1.4" (36 mm) HF compression driver

Enclosure

Connectors	2 x Neutrik speakON* NL4
Wiring	
Passive	Pins 1+ / 1- input, pins 2+ / 2- link
Bi-Amp	Pins 1+ / 1- LF, pins 2+ / 2- HF
Dimensions HWD	1219 x 533 x 508 mm (48.0 x 21.0 x 20.0")
Net Weight	46.9 kg (103.5 lbs)
Construction	15 mm (5/8") birch plywood
Finish	Semi matt black paint
Grille	Powder-coated perforated steel

Portable Speakers

MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications



Portable Speakers

MADRID TMS153


Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications



Portable Speakers

MADRID TMS153

Dual 2 Way 15" Full Range
Loudspeaker for Portable PA and
Installation Applications

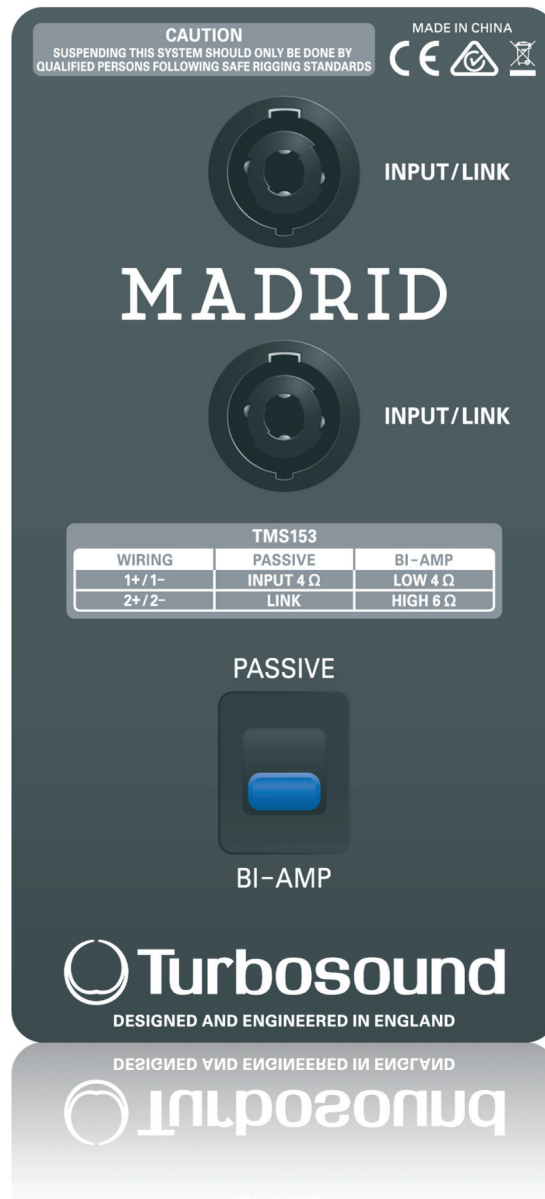

For service, support or more information contact the TURBOSOUND location nearest you:

Europe
MUSIC Group Services UK
Tel: +44 156 273 2290
Email: CARE@music-group.com

USA/Canada
MUSIC Group Services NV Inc.
Tel: +1 702 800 8290
Email: CARE@music-group.com

Japan
MUSIC Group Services JP K.K.
Tel: +81 3 6231 0454
Email: CARE@music-group.com

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNÖY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd.
© MUSIC Group IP Ltd. 2016 All rights reserved.

