



TS-680 Series Conference System




Simple and Compact Wired Conference System

TS-680 Series Conference System

System Benefits

- Plug-and-play system.
- Up to 24 units can be connected per Central Unit.
- Suitable for small-scale corporate boardrooms and meeting rooms.
- Test function allows connections to be accurately verified.
- Connect a recording device for high-quality audio recording of conferences.
- Compact and stable hardware design.

System Example

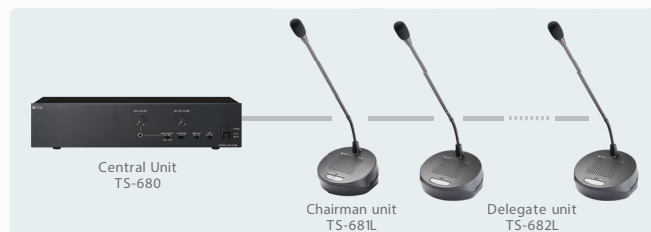

TS-680 Central Unit	
Input	1 x Mic: -60 dB*, 600 Ω, unbalanced, phone jack 1 x AUX: -20 dB*, 10 kΩ, unbalanced, phone jack
Output	1 x Recording: -20 dB*, 10 kΩ, unbalanced, RCA pin jack
No. of connectable Chairman/Delegate Unit	24
Function Switch	Speaker restriction: Delegate unit's simultaneous operation set to 0, 1, 2 and 3 Mic-off function: off or 30 sec. (selectable)
Applicable Unit	TS-681L, TS-682L
Dimensions	420 (W) x 96.1 (H) x 222.5 (D) mm
Weight	2.7 kg
TS-681L Chairman Unit with Long Microphone	
Power Source	36V DC (supplied from TS-680 Central Unit)
Input	Microphone terminal: XLR-4-31 type
Output	Monitor speaker: 130 Ω, 200 mW Headphone/Recording: Mini jack x 1
Connection Terminal	DIN 8P connector
Function	Monitor speaker volume Headphone volume Priority speech function
Microphone	Electret Condenser Unidirectional 1.8 kΩ -37 dB (1 kHz, 0 dB = 1 V/Pa) 100 Hz - 13 kHz 510 mm
Dimensions	145.3 (W) x 70.7 (H) x 150.5 (D) mm (excluding microphone)
Weight	800 g
TS-682L Delegate Unit with Long Microphone	
Power Source	36V DC (supplied from TS-680 Central Unit)
Input	Microphone terminal: XLR-4-31 type
Output	Monitor speaker: 130 Ω, 200 mW Headphone/Recording: Mini jack x 1
Connection Terminal	DIN 8P connector
Function	Monitor speaker volume Headphone volume
Microphone	Electret Condenser Unidirectional 1.8 kΩ -37 dB (1 kHz, 0 dB = 1 V/Pa) 100 Hz - 13 kHz 510 mm
Dimensions	145.3 (W) x 70.7 (H) x 150.5 (D) mm (excluding microphone)
Weight	800 g

* 0 dB = 1 V

Other System Components

Extension Cord



YR-780-2M



YR-780-10M

Rack Mount Bracket



MB-23B