



AWP06

SpringFit™ waterproof ceiling speaker 8Ω and 100V

Highlights:

- Spring-clamp mounting mechanism
- IP65 Ingress protection
- Multi-tapping 100V line transformer
- 4" dual cone driver
- plastic enclosure
- Aluminum grill

The AWP06 is a waterproof ceiling speaker with a power of 6 Watt which meets the IP65 standard. It is designed to be used in a wide variation of in- and outdoor applications and damp locations and features a 4" loudspeaker. Due to its wide smooth frequency response and high efficiency, it ensures high-fidelity music reproduction and intelligible speech at very low distortion. It can be used in 8 Ohm low impedance systems or in 100V PA systems with power taps for 6 Watt, 3 Watt and 1.5 Watt.

Applications:

- Terraces
- Spas
- Sport facilities
- Bathrooms
- Swimming pool areas



Certification:



Impedance:



Voltage:



System specifications:

Max. Power		10 W
RMS Power		6 W
Frequency	Response (± 3 dB)	100 Hz - 15 kHz
Sound Pressure (Max. W/1m)		95 dB
Line Transformer Tappings	1	6 W / 1666 Ω
	2	3 W / 3333 Ω
	3	1.5 W / 6666 Ω
Impedance		8 Ω
Ingress Protection rating		IP65
Drivers		4"

Product Features:


Dimensions		140 x 148.5 mm (Ø x H)
Built-in depth		148.5 mm
Cut-out measurement		125 mm (Ø)
Weight		0.79 kg
Operating temperature		-20 °C ~ 60 °C
Construction		ABS
Colours		White (RAL9010)

Variants:

- AWP06/W - White version

Shipping & Ordering:

Packaging	Cardboard box
Shipping weight & volume	1.088 kg - 0.0039 Cbm

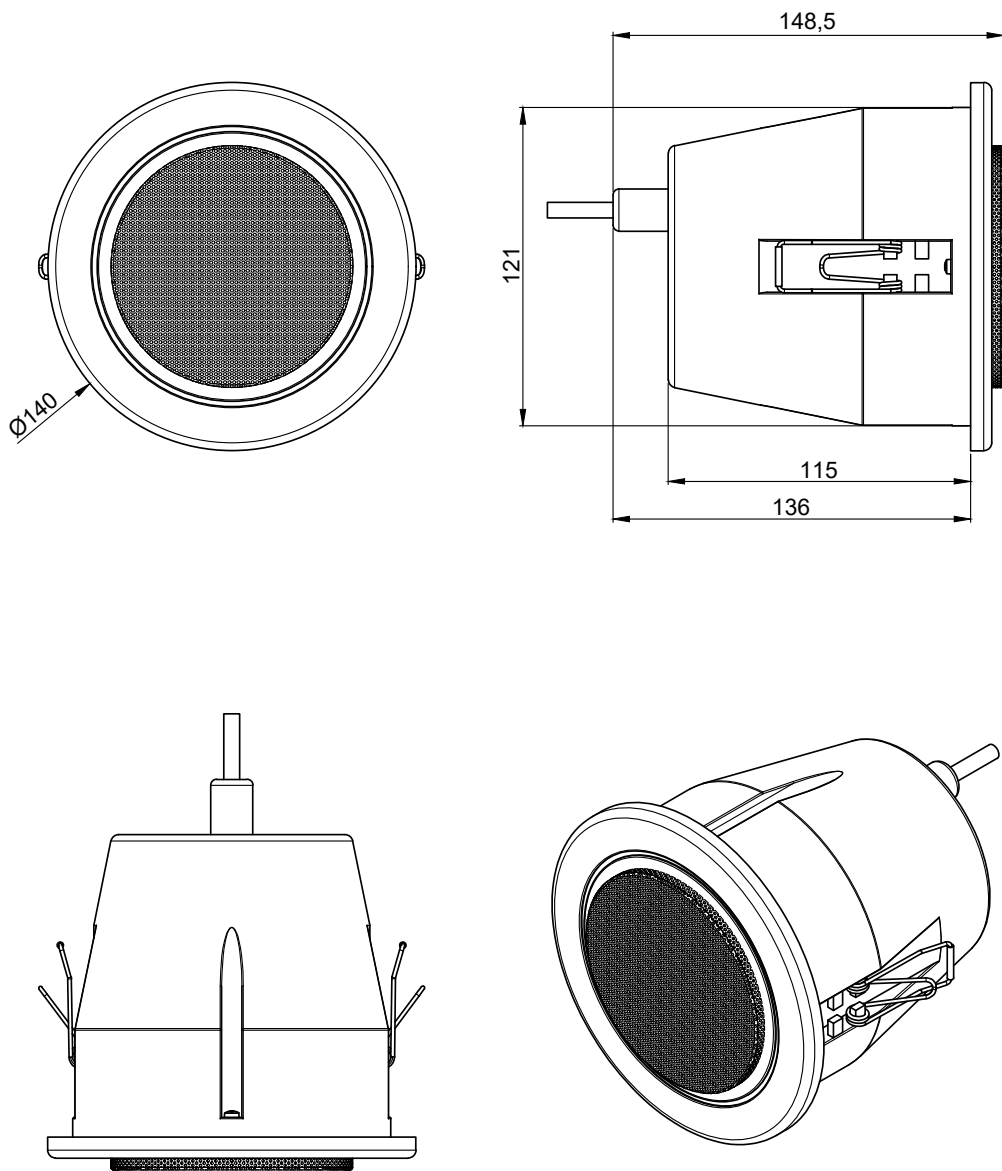

AWP06		Product description: WATERPROOF CEILING SPEAKER 6W/100V & 8OHM - IP65	
Weight: 0,79 kg		Outer dimensions: (w x h x d) Ø140 x 148,5	Unit height: N/A