



## DRX-8.4


### 11.4 Channel Network A/V Receiver

#### INTEGRA DRX-8.4 OVERVIEW

- 150 Watts x 11 amplifier channels
- All-new Integra symmetric class AB amplifier design
- 11.4 ch preouts (2 independent sub outs)
- Dirac Live® Room Correction Full Bandwidth included  
*Dirac Live Bass Control ready as an optional user upgrade*
- High-performance ESS Sabre DACs
- XLR connectivity
- Full suite of custom integration software tools

#### OUR PASSION FOR QUALITY, BUILT FOR INTEGRATORS

Our close working relationships with integrators gives us the leading edge in tailoring holistic, end-to-end solutions for the premium lifestyle consumer...and you, the professional installer. The Integra DRX-8.4 boasts more power, more symmetry, and an unprecedented number of referral-ready features. Simply put: we mean business, and we're ushering in a new dawn of audiophile-level sound with this industry-dominating AVR.

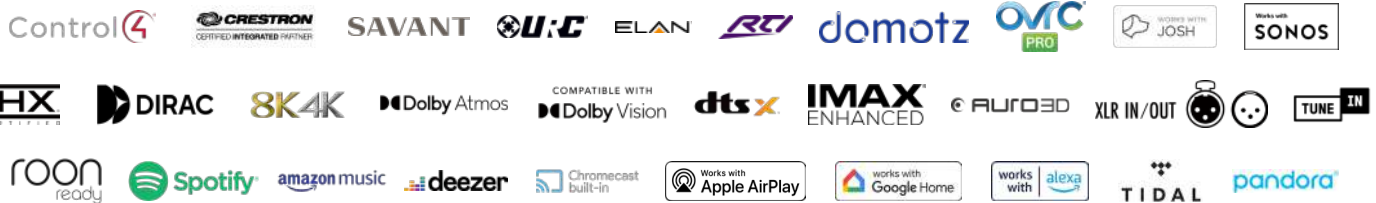

# Integra®



<b>AUDIO</b>	11 Channel Amplifier
	150 Watts per channel (8 ohms, 20 Hz–20 kHz, 0.08% THD, 2-ch driven, FTC)
	All new Integra symmetric class A/B amplifier design
	All new Integra engineered chassis and audio signal path for optimum noise reduction and signal clarity
	Two precision 32-bit ESS ES9026PRO Hyperstream® audiophile DACs
<b>DSP</b>	11.4 channel processing for up to 7.2.4 configurations
	2 INDEPENDENT subwoofer channels plus 2 parallel outputs for connectivity convenience
	Dolby Atmos®, DTS:X®, Auro-3D FW update June '23, IMAX Enhanced, Dolby Atmos Music and other major formats
<b>DIRAC LIVE ROOM CALIBRATION</b>	Dirac Live Premium License INCLUDED (20Hz - 20kHz) - no upgrade required; enables quick out of box setup
	Setup via Dirac PC/MAC app and optional USB mic (Advanced), OR free Integra mobile app and included wired mic (Basic)
	Dirac Live Bass Control ready (single or multi) as an optional user upgrade
<b>VIDEO</b>	Newly designed HDMI 2.1 signal paths with (6) 40Gbps inputs capable of 8K/60 and 4K/120
	Total of 7 HDMI Inputs/3 Outputs & eARC
<b>PREMIUM CONNECTIONS</b>	11.4 channel RCA preouts
	XLR preouts for L/C/R/SW1/SW2
	Stereo XLR input

<b>NETWORK</b>	Roon Ready (RAAT network interface code preinstalled in the device) (FW update June)
	Chromecast built-in, Airplay 2 (defeatable in AVR setup for smoother client UX)
	Spotify, Amazon Music HD, Tidal, Deezer, Pandora, TuneIn
	Works with Sonos Certified
	AptX HD Bluetooth transmitter for personal listening
<b>CONTROL AND SERVICE</b>	Advanced Web App for setup, backup and recall of all avr settings; Default password can be changed by dealer
	Wireless room calibration using Dirac PC/Mac app and optional USB mic (UMIK-1 recommended)
	Quad core network processor for ultimate IP responsiveness and stability
	Assignable amps for Zone 2, Zone 3, and passive subwoofers
	Compatible with OVRc Pro, Domotz, Luxul Pro Watch, VPN, and other monitoring platforms
	Onboard diagnostics tool kit, including test patterns and EDID/HDCP adjustment, virtual remote; all available via web app
	Integra's most robust API ever, with discrete commands for virtually any AVR function
	Custom control drivers based on Integrator feedback. Developed and maintained by Integra's software team in Osaka, Japan
<b>RACK KIT</b>	IRK-180-4C (Optional)
<b>DIMENSIONS</b>	17 1/8" x 7 13/16" x 18 1/2" (435 x 198 x 470 mm);
<b>WEIGHT</b>	49.6 lbs (22.5 kg)

Due to a policy of continuous product improvement, Integra reserves the right to change specifications and appearance without notice.