

# F 10XR

## 10-CHANNEL MIXING CONSOLE WITH MULTI-FX & RECORDING

### DESCRIPTION

The F 10XR features 4 mic preamp inputs, 2 mono line inputs, 4 stereo line inputs plus multi-FX and recording via USB port, with balanced main output (stereo XLR + TRS) and 2 single control compressors. The mono channels are provided with 3-band EQ and stereo channels with 2-band. The mixer features 16 PRO DSP internal FX presets and an aux send (post fader) with rotary knob control.



### FEATURES

- 4 Mic preamp inputs, 2 mono line inputs
- 4 stereo line inputs
- PRO DSP FX onboard with 16 presets
- Stereo recording and playback via USB port
- 2 single control compressors
- Balanced main output +28 dB (Stereo XLR + TRS)
- 1 aux/FX (post)
- Sturdy metal chassis
- External universal power supply
- Designed and engineered in Italy



## TECHNICAL SPECIFICATIONS

### Electronic specifications

Frequency Response:	20 Hz ÷ 20 kHz
THD+N, 20dB gain, 0dBu out	<0,02

### Inputs

Mic:	4
Gain Range:	0 dB ÷ -50 dB
Mic Inputs Impedance:	14 kohm
Low Cut:	80 Hz
Phantom Power +48V:	Yes
Mono Line:	2
Gain Selection:	20 dB ÷ -30 dB
Line Input Impedance:	21 kohm
Stereo Line:	4
Gain Selection:	20 dB ÷ -30 dB
Stereo Line Input Impedance (kOhm)	15 kohm

### Outputs

Main MIX:	1
Control Room:	Yes
FX Send:	1
AUX Output:	1
Phones:	1

### Outputs specifications

Main Out Level:	28 dBu
Aux Out Level:	28 dBu
Phones Out impedance (ohm):	150 ohm

### Compressors

RCF Compressors:	n° 2 Single Control compressors on channels 1&2
------------------	---

### EQ

Input Channels EQ:	2 Shelving / 1 Generic
Description:	High: +/-15 dB @ 10 kHz Shelving Mid: +/-15 dB @ 1,250 kHz Bell Low: +/-15 dB @ 100 Hz Shelving

### Auxiliary sends

FX POST:	1
----------	---

### Internal Effects

Send Effects:	1
---------------	---







<b>USB audio</b>	Type:	B
	Play trk:	2
	Rec trk:	2
	Supported Sample Rate:	44.1, 48.0
<hr/>		
<b>Other features</b>	Footswitch:	Yes
<hr/>		
<b>Electrical specifications</b>	Power supply:	External
	Voltage requirements:	100 V - 240 V
	Power consumption (MAX):	18 W
<hr/>		
<b>Standard compliance</b>	CE marking:	Yes
<hr/>		
<b>Physical specifications</b>	Cabinet/Case Material:	Metal
	Color:	Black
<hr/>		
<b>Size</b>	Height:	82 mm / 3.23 inches
	Width:	294 mm / 11.57 inches
	Depth:	275 mm / 10.83 inches
	Weight:	2.8 kg / 6.17 lbs
<hr/>		
<b>Shipping informations</b>	Package Height:	130 mm / 5.12 inches
	Package Width:	400 mm / 15.75 inches
	Package Depth:	345 mm / 13.58 inches
	Package Weight:	3.8 kg / 8.38 lbs

**PART NUMBER**

- **17140089**

F 10XR

EAN 8024530016142

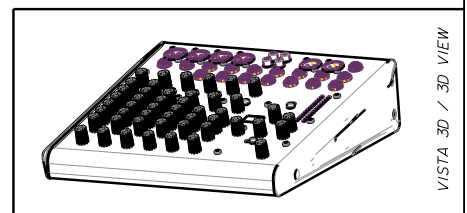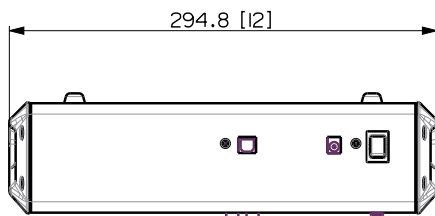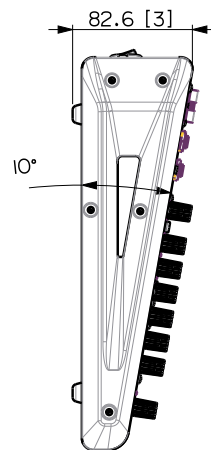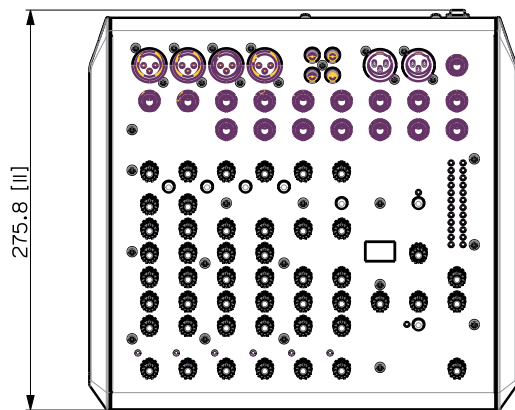

MIXER F IOXR 90-240 V

REV.  
A